

## FO connectors - FOC-C-SCRJ-PCF - 1411304

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



SC-RJ connector, with bend protection, for 200/230  $\mu\text{m}$ , 50/200/230  $\mu\text{m}$ , and 62.5/200/230  $\mu\text{m}$  PCF fibers

SC-RJ

### Product Description

SC-RJ connector, with bend protection, for 200/230  $\mu\text{m}$ , 50/200/230  $\mu\text{m}$ , or 62.5/200/230  $\mu\text{m}$  PCF fibers

### Your advantages

- ✓ For quick and easy field assembly
- ✓ No bonding or polishing
- ✓ Optimum attenuation values with easy assembly
- ✓ Fulfills IEC 61753 category: Extreme Environment
- ✓ Cleave technology
- ✓ Suitable for the following fiber types: 200/230  $\mu\text{m}$ , 50/200/230  $\mu\text{m}$ , 62.5/200/230  $\mu\text{m}$



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 924931
GTIN	4046356924931
Custom tariff number	85367000
Country of origin	Bulgaria

### Technical data

#### Mechanical characteristics

Number of slots	2
Insertion/withdrawal cycles	$\leq 500$

## FO connectors - FOC-C-SCRJ-PCF - 1411304

### Technical data

#### Mechanical characteristics

Cable outlet	straight
No. of cable outlets	2
Weight	8.3 g
Flammability rating according to UL 94	V0

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (assembly)	0 °C ... 50 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Degree of protection	IP20

#### Material data

Housing material	PBT
Width	16.5 mm
Height	8.94 mm
Length	56 mm

#### Standards and Regulations

Flame resistance	yes
Flammability rating according to UL 94	V0


#### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

### Drawings


# FO connectors - FOC-C-SCRJ-PCF - 1411304

Dimensional drawing

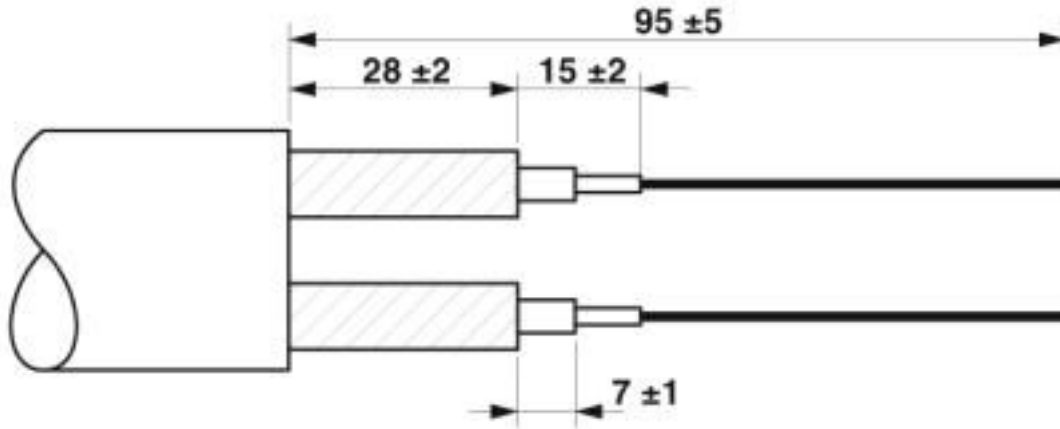

SC-RJ connector IP20

Schematic diagram

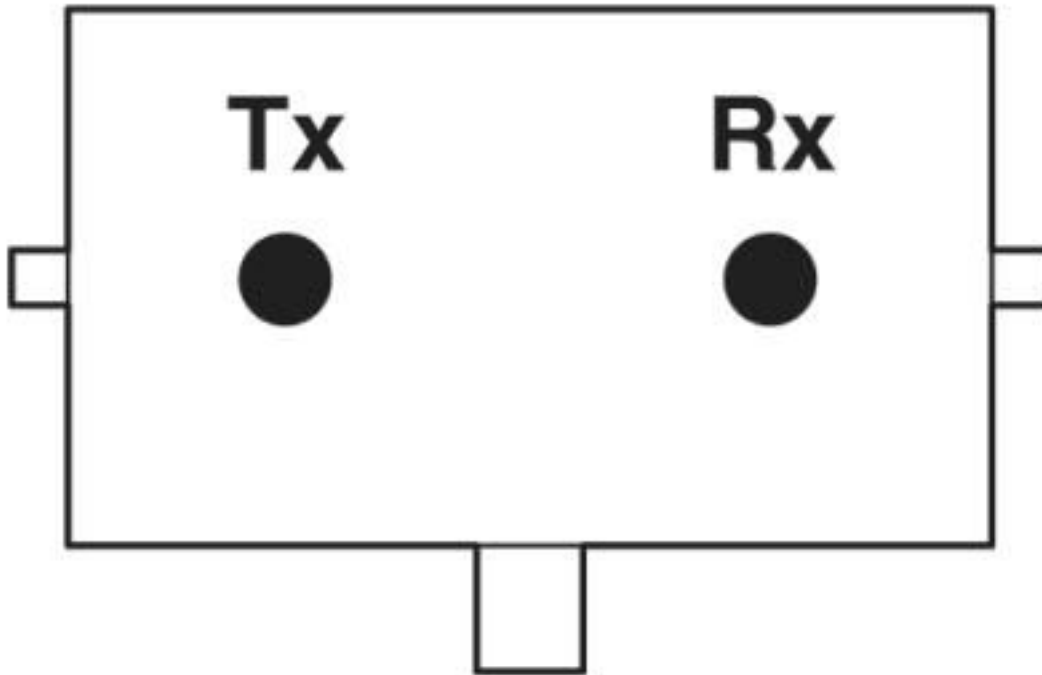

## Classifications

eCl@ss

eCl@ss 10.0.1	19170122
---------------	----------

# FO connectors - FOC-C-SCRJ-PCF - 1411304

## Classifications

### eCl@ss

eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27260700
eCl@ss 6.0	27180800
eCl@ss 8.0	19170122
eCl@ss 9.0	19170122

### ETIM

ETIM 4.0	EC001031
ETIM 5.0	EC001122
ETIM 6.0	EC001122
ETIM 7.0	EC001122

### UNSPSC

UNSPSC 13.2	43223310
UNSPSC 18.0	43223310
UNSPSC 19.0	43223310
UNSPSC 20.0	43223310
UNSPSC 21.0	43223310

## Approvals

### Approvals

---

Approvals

EAC

---

Ex Approvals

---

### Approval details

EAC		B.01742
-----	---	---------

## FO connectors - FOC-C-SCRJ-PCF - 1411304

### Accessories

#### Accessories

Fiber optics connector (device side)

SC-RJ female insert - VS-SCRJ-GOF-BU/BU - 1652978



SC-RJ socket insert, duplex, for VS-A-F-IP67 panel mounting frame, can be used for fiberglass (multi-mode and single mode), PCF, and polymer fibers

---

Tool set - FOC-TOOL-PCF KONF SET - 1411051



Tool set for PCF assembly, for 200/230 µm, 50/200/230 µm, and 62.5/200/230 µm PCF fibers

---

### Necessary add-on products

Tool set - FOC-TOOL-PCF KONF SET - 1411051



Tool set for PCF assembly, for 200/230 µm, 50/200/230 µm, and 62.5/200/230 µm PCF fibers

---

### Additional products

FO accessories - FOC-TOOL-FERRULECLEANER-2.50 - 1407029



2.50 mm ferrule cleaner, for ST, SC, FC, E2000 (also APC), approx. 500 cleaning cycles

---

---