

Profile gasket - HC-B16-SP-CBK - 1411480

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Profile gasket for HEAVYCON EVO supporting base element type B16, conductive

Product Description

Profile gasket, for HC-EVO... / HC-STA... supporting base elements



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	10 pc
GTIN	 4 046356 932813
GTIN	4046356932813
Weight per Piece (excluding packing)	4.000 g
Custom tariff number	40169300
Country of origin	China

Technical data

Dimensions

Length	93.5 mm
Width	43.8 mm
Height	3800 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

General

Material	NBR, conductive
----------	-----------------

Profile gasket - HC-B16-SP-CBK - 1411480

Technical data

General


Color	black
Assembly instructions	The replacement seal should be bonded with Loctite 454 adhesive.
Connection	For HC-EVO-B16...AL housing and HC-STA-B16...AL

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Dimensional drawing

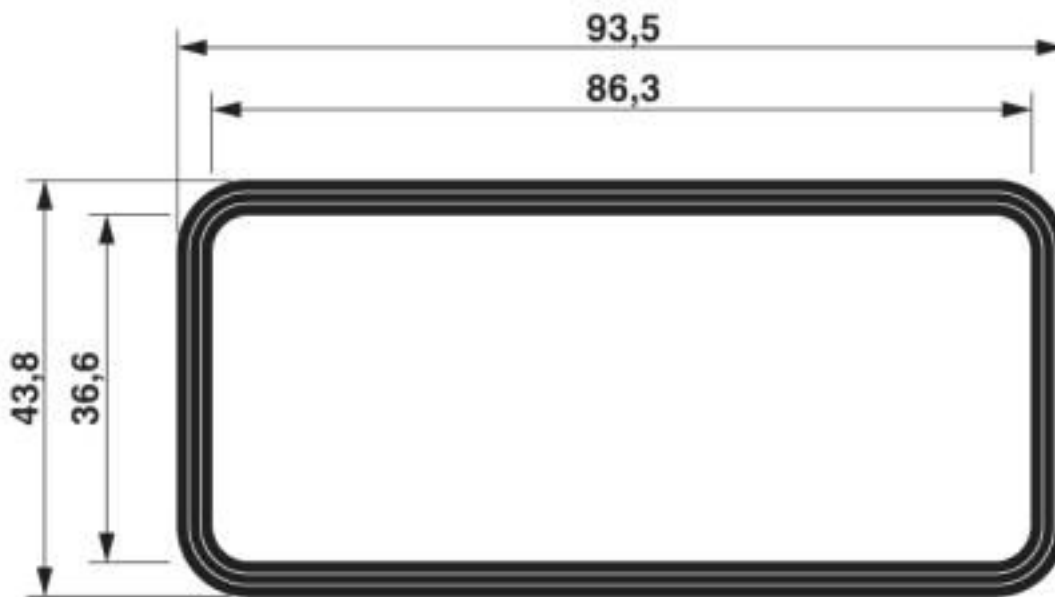

Dimensional drawing

Classifications

eCl@ss

eCl@ss 10.0.1	23071590
eCl@ss 4.0	27378000
eCl@ss 4.1	27378000
eCl@ss 5.0	27379100
eCl@ss 5.1	27379100

Profile gasket - HC-B16-SP-CBK - 1411480

Classifications

eCl@ss

eCl@ss 6.0	23071500
eCl@ss 7.0	23071590
eCl@ss 8.0	23071590
eCl@ss 9.0	23071590

ETIM

ETIM 4.0	EC002498
ETIM 5.0	EC002498
ETIM 6.0	EC000761
ETIM 7.0	EC000761

UNSPSC

UNSPSC 13.2	39131505
UNSPSC 18.0	31401601
UNSPSC 19.0	31401601
UNSPSC 20.0	31401601
UNSPSC 21.0	31401601

Approvals


Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		RU C- DE.AI30.B.01102
-----	---	--------------------------