

Set - EV-SET-T2AC-BAS-RCM1-20AC5MES - 1628077

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HOME charging technology set starter kit For easy assembly of a charging station, IEC 62196-2, IEC 61851-1, Mode 3, Case C, 4 kW, 16 A, 230 V AC, cable: 5 m


Product Description

HOME charging technology set with AC charging cable, with sample assembly and installation instructions for a charging station for E-Mobility (EVSE), including recommendations for further components required (charging contactor, safety equipment), for charging electric vehicles (EV) with alternating current (AC) via Type 2 Vehicle Inlets

Your advantages

- ✔ Set of all Phoenix Contact charging technology products and terminal blocks with recommendations for further components required (charging contactor, safety equipment)
- ✔ Convenient ordering, thanks to just one order number for the set, saving you the job of putting together matching components
- ✔ Certified in accordance with IATF 16949:2016 and ISO 9001:2015
- ✔ Safe use, thanks to verified instructions regarding compatible components
- ✔ Stand-alone and simple setup of an AC charging station without additional development effort based on a wiring diagram
- ✔ Flexible application options, thanks to comprehensive configuration options and various communication interfaces for the charging controller

Key Commercial Data

| | |
|----------------------|---|
| Packing unit | 1 |
| GTIN |  4 055626 379067 |
| GTIN | 4055626379067 |
| Custom tariff number | 85366990 |

Technical data

Product definition

| | |
|-------------|--|
| Type | HOME charging technology set starter kit |
| Application | For easy assembly of a charging station |

Set - EV-SET-T2AC-BAS-RCM1-20AC5MES - 1628077

Technical data

Product definition

| | |
|-------------------------------------|---|
| Standards/regulations | IEC 62196-2 |
| | IEC 61851-1 |
| Charging standard | Type 2 |
| Charging mode | Mode 3, Case C |
| Number of supported charging points | 1 |
| Note | Set of all Phoenix Contact charging technology products and terminal blocks with recommendations for further components required (charging contactor, safety equipment) |
| | The installation and startup of this device may only be performed by an electrically skilled person. Observe the applicable national standards and regulations. |
| | The individual components bear a CE marking if legally required. |

Dimensions

| | |
|------------------|--------|
| Conductor length | 5.00 m |
|------------------|--------|

Electrical properties

| | |
|--------------------------|-----------------|
| Type of charging current | AC single-phase |
| Charging power | 3.7 kW |
| Charge current | 16 A |
| Charging voltage | 230 V AC |

Charging technology set

| | |
|------------------------------------|--|
| Type of charging point | AC charging cable with Vehicle Connector, open cable end, protective cap, holder (park position) |
| Charging controller | Basic AC charging controller, preconfigured |
| Residual current monitoring module | 1-channel RCM |
| Wiring diagram | Including download of sample E-Plan |
| Set consists of | 1627354 EV-T2G3C-1AC20A-5,0M2,5ESBK01 |
| | 1624148 EV-T2AC-PARK |
| | 1622459 EV-CC-AC1-M3-CC-SER-HS |
| | 1622450 EV-RCM-C1-AC30-DC6 |
| | 3211929 PT 6-TWIN |
| | 3211485 PT 6-TWIN BU |
| | 3211498 PT 6-TWIN-PE |
| | 3209510 PT 2,5 |
| | 3209523 PT 2,5 BU |
| | 3209536 PT 2,5-PE |
| | 3211861 PT 4-HESI (5X20) |
| | 3030284 FBS 2-8 |
| | 3032570 FBS 3-8 BU |

Set - EV-SET-T2AC-BAS-RCM1-20AC5MES - 1628077

Technical data

Charging technology set


| | |
|--|----------------------|
| | 3030420 D-ST 4 |
| | 3211508 D-PT 6-TWIN |
| | 3022276 CLIPFIX 35-5 |

Environmental Product Compliance

| | |
|------------|---|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Connection diagram

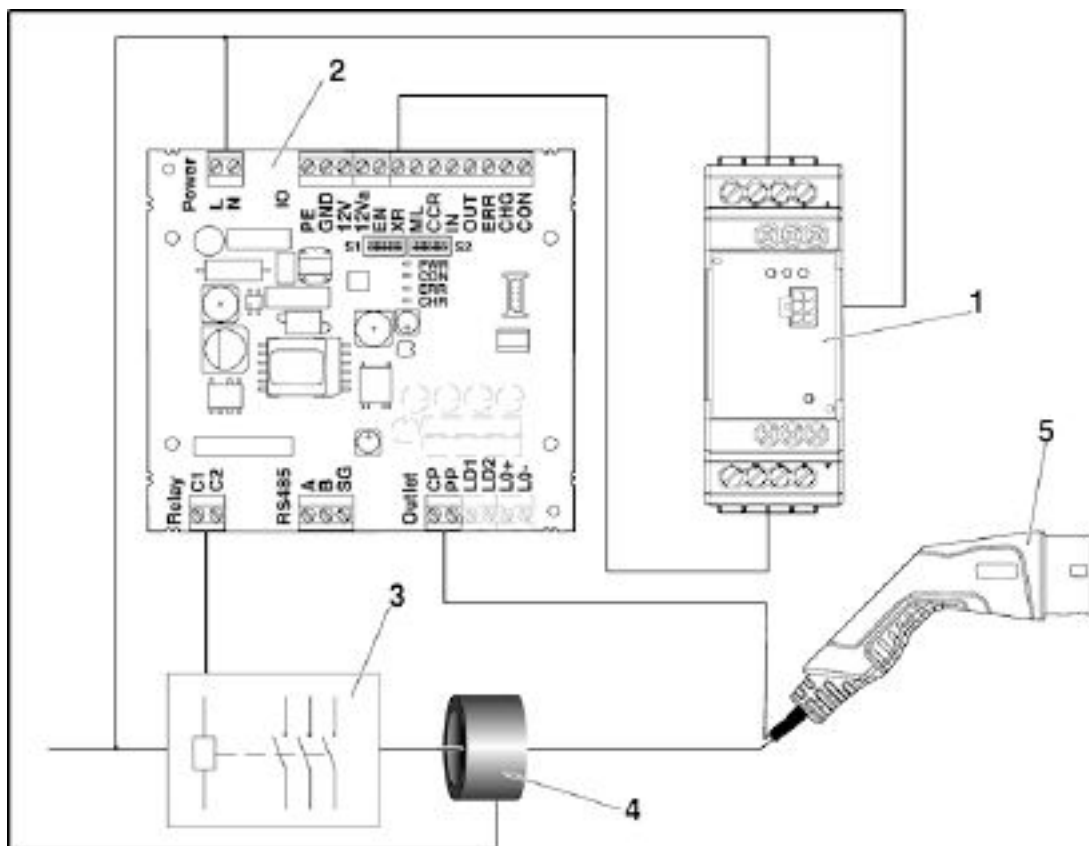

Connection drawing:

- 1. RCM, 2. Charging controller, 3. Charging contactor, 4. RCM sensor coil, 5. Charging cable

Set - EV-SET-T2AC-BAS-RCM1-20AC5MES - 1628077

Articles in set

AC charging cable - EV-T2G3C-1AC20A-5,0M2,5ESBK01 - 1627354



AC charging cable, With vehicle charging connector and open cable end, With protective cap, Housing color black-gray, For charging electric vehicles (EV) with alternating current (AC) via type 2 vehicle charging inlets, For installation at charging stations for electromobility (EVSE), Type 2, IEC 62196-2, 20 A / 250 V (AC), C-Line, "PHOENIX CONTACT" logo, cable: 5 m, black, straight

Park position - EV-T2AC-PARK - 1624148



Park position, Retainer for Vehicle Connector as parking position at charging stations (EVSE), Type 2, IEC 62196-2, Front mounting

AC charging controller - EV-CC-AC1-M3-CC-SER-HS - 1622459



The EV-CC-AC1-M3-CBC-SER-HS charging controller with housing for DIN rail mounting is used for charging electric vehicles at 3-phase AC networks according to IEC 61851-1, Mode 3. Optimized for charging stations with permanently mounted Vehicle Connector. All charging functions and comprehensive configuration settings are already integrated.

Differential current monitoring - EV-RCM-C1-AC30-DC6 - 1622450



The residual current module is used for AC and DC residual current detection in AC charging points. The higher-level safety equipment (e.g., residual current circuit breaker) is protected against potential DC residual currents. A 1 or 2-channel product version is available.

Feed-through terminal block - PT 6-TWIN - 3211929



Feed-through terminal block, nom. voltage: 1000 V, nominal current: 41 A, connection method: Push-in connection, number of connections: 3, cross section: 0.5 mm² - 10 mm², AWG: 20 - 8, width: 8.2 mm, height: 42.2 mm, color: gray, mounting type: NS 35/7,5, NS 35/15

Set - EV-SET-T2AC-BAS-RCM1-20AC5MES - 1628077

Articles in set

Feed-through terminal block - PT 6-TWIN BU - 3211485



Feed-through terminal block, nom. voltage: 1000 V, nominal current: 41 A, connection method: Push-in connection, number of connections: 3, cross section: 0.5 mm² - 10 mm², AWG: 20 - 8, width: 8.2 mm, height: 42.2 mm, color: blue, mounting type: NS 35/7,5, NS 35/15

Ground modular terminal block - PT 6-TWIN-PE - 3211498



Ground modular terminal block, connection method: Push-in connection, number of connections: 3, cross section: 0.5 mm² - 10 mm², AWG: 20 - 8, width: 8.2 mm, height: 42.2 mm, color: green-yellow, mounting type: NS 35/7,5, NS 35/15

Feed-through terminal block - PT 2,5 - 3209510



Feed-through terminal block, nom. voltage: 800 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 2, number of positions: 1, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 5.2 mm, height: 35.3 mm, color: gray, mounting type: NS 35/7,5, NS 35/15

Feed-through terminal block - PT 2,5 BU - 3209523



Feed-through terminal block, nom. voltage: 800 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 2, number of positions: 1, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 5.2 mm, height: 35.3 mm, color: blue, mounting type: NS 35/7,5, NS 35/15

Ground modular terminal block - PT 2,5-PE - 3209536



Ground modular terminal block, connection method: Push-in connection, number of connections: 2, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 5.2 mm, height: 35.3 mm, color: green-yellow, mounting type: NS 35/7,5, NS 35/15

Set - EV-SET-T2AC-BAS-RCM1-20AC5MES - 1628077

Articles in set

Fuse modular terminal block - PT 4-HESI (5X20) - 3211861



Fuse modular terminal block, fuse type: Glass / ceramics / ..., connection method: Push-in connection, cross section: 0.2 mm²- 6 mm², AWG: 24 - 10, nominal current: 6.3 A, nom. voltage: 400 V, width: 6.2 mm, fuse type: G / 5 x 20, mounting type: NS 35/7,5, NS 35/15, color: black

Plug-in bridge - FBS 2-8 - 3030284



Plug-in bridge, pitch: 8.2 mm, width: 14.7 mm, number of positions: 2, color: red

Plug-in bridge - FBS 3-8 BU - 3032570



Plug-in bridge, pitch: 8.2 mm, width: 22.9 mm, number of positions: 3, color: blue

End cover - D-ST 4 - 3030420



End cover, length: 55.9 mm, width: 2.2 mm, height: 29 mm, color: gray

End cover - D-PT 6-TWIN - 3211508



End cover, length: 74 mm, width: 2.2 mm, height: 36 mm, color: gray

Set - EV-SET-T2AC-BAS-RCM1-20AC5MES - 1628077

Articles in set

End clamp - CLIPFIX 35-5 - 3022276



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27144792 |
| eCl@ss 9.0 | 27144792 |

ETIM

| | |
|----------|----------|
| ETIM 5.0 | EC001321 |
| ETIM 6.0 | EC002884 |
| ETIM 7.0 | EC002884 |