

Reducing adapter - REDUC-M-KV-M40/M32 - 1647640

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Reducing adapter, material: Brass, nickel-plated, connecting thread: M40 x 1.5, color: silver, with O-ring

Product Description

Reduced M40 to M32

Key Commercial Data

| | |
|--------------------------------------|---------------------|
| Packing unit | 1 pc |
| Minimum order quantity | 10 pc |
| GTIN | 4 017918 941543 |
| GTIN | 4017918941543 |
| Weight per Piece (excluding packing) | 45.630 g |
| Custom tariff number | 74199990 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|----------------------------------|---------|
| Length | 11.5 mm |
| Length without connecting thread | 3.5 mm |
| Connecting thread diameter | 40 mm |
| Hexagon angular dimension | 43 mm |
| Length of the connecting thread | 8 mm |

Ambient conditions

| | |
|---------------------------------|---|
| Degree of protection (IP) | IP65 (Depends on the screw connection used) |
| Ambient temperature (operation) | -20 °C ... 80 °C |

Reducing adapter - REDUC-M-KV-M40/M32 - 1647640

Technical data

General

| | |
|-----------------|----------------------|
| Material | Brass, nickel-plated |
| Outer thread | M40 |
| Internal thread | M32 |
| Torque | 11 Nm ... 12 Nm |
| Color | silver |

Standards and Regulations

| | |
|--------------|----|
| Halogen-free | no |
|--------------|----|


Environmental Product Compliance

| | |
|------------|---|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Reducing adapter - REDUC-M-KV-M40/M32 - 1647640

Dimensional drawing

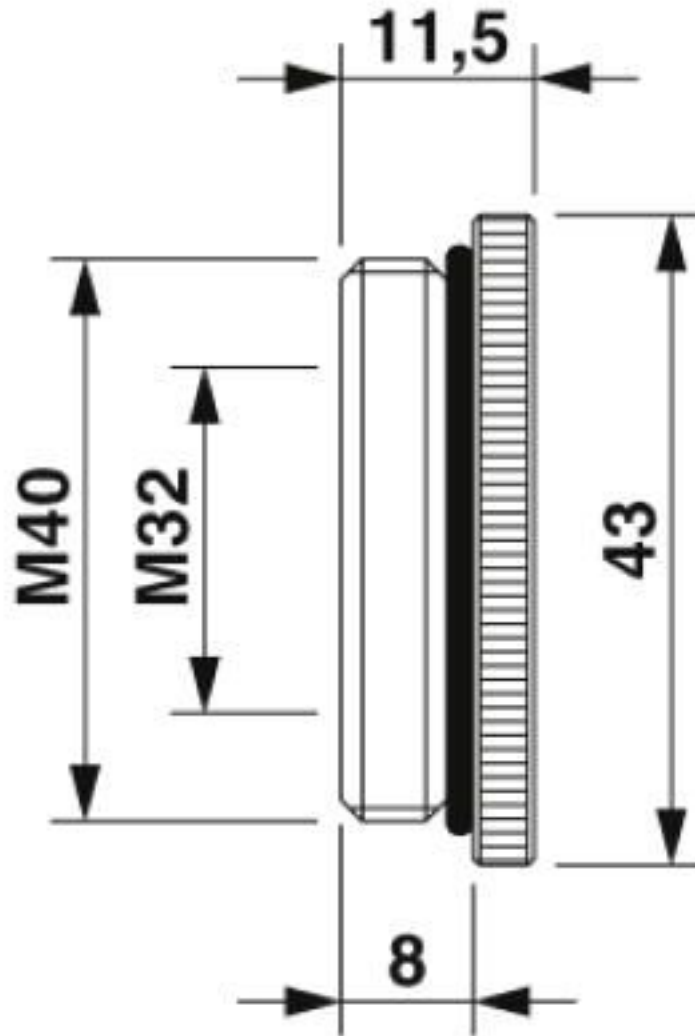

Dimensional drawing

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27440201 |
| eCl@ss 4.0 | 27141200 |
| eCl@ss 4.1 | 27141200 |
| eCl@ss 5.0 | 27149100 |
| eCl@ss 5.1 | 27149100 |

Reducing adapter - REDUC-M-KV-M40/M32 - 1647640

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 6.0 | 27149100 |
| eCl@ss 7.0 | 27439207 |
| eCl@ss 8.0 | 27149109 |
| eCl@ss 9.0 | 27440201 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000441 |
| ETIM 3.0 | EC000441 |
| ETIM 4.0 | EC000441 |
| ETIM 5.0 | EC000938 |
| ETIM 6.0 | EC002309 |
| ETIM 7.0 | EC002309 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211808 |
| UNSPSC 7.0901 | 39121408 |
| UNSPSC 11 | 39121408 |
| UNSPSC 12.01 | 39121408 |
| UNSPSC 13.2 | 39121408 |
| UNSPSC 18.0 | 31261501 |
| UNSPSC 19.0 | 31261501 |
| UNSPSC 20.0 | 31261501 |
| UNSPSC 21.0 | 31261501 |