

Extension adapter - ENLAR-M-KV-M32/M40 - 1647682


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Step-up adapter, M32 to M40, including O-ring



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	10 pc
GTIN	 4 017918 947095
GTIN	4017918947095
Weight per Piece (excluding packing)	43.000 g
Custom tariff number	74199990
Country of origin	Germany

Technical data

Dimensions

Length	23 mm
Length without connecting thread	16 mm
Connecting thread diameter	32 mm
Hexagon angular dimension	42 mm
Length of the connecting thread	7 mm

Ambient conditions

Degree of protection (IP)	IP65 (Depends on the screw connection used)
Ambient temperature (operation)	-20 °C ... 80 °C

General

Extension adapter - ENLAR-M-KV-M32/M40 - 1647682

Technical data

General

Material	Brass, nickel-plated
O-ring material	NBR
Outer thread	M32
Internal thread	M40
Color	silver

Standards and Regulations

Halogen-free	no
--------------	----


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Extension adapter - ENLAR-M-KV-M32/M40 - 1647682

Dimensional drawing

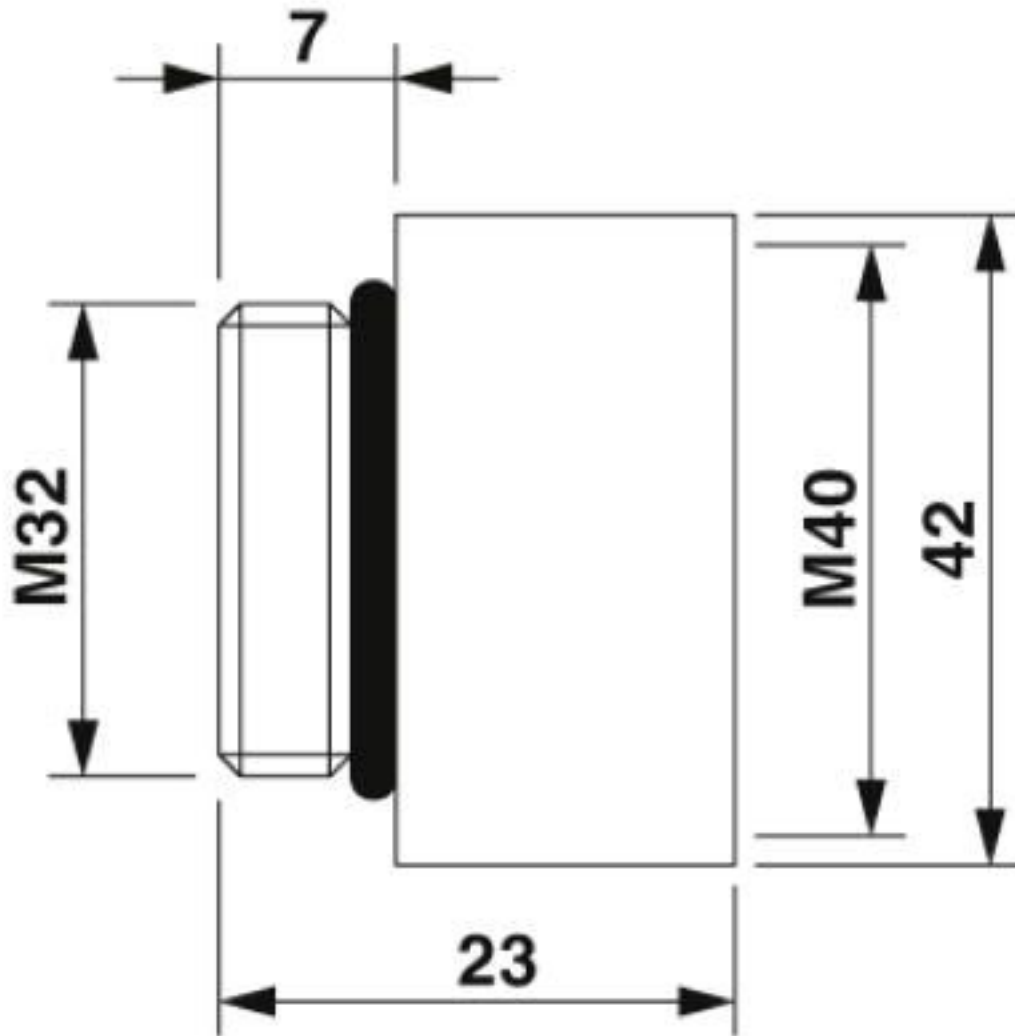

Classifications

eCl@ss

eCl@ss 10.0.1	27430314
eCl@ss 4.0	27141200
eCl@ss 4.1	27141200
eCl@ss 5.0	27149100
eCl@ss 5.1	27149100
eCl@ss 6.0	27149100
eCl@ss 7.0	27439207

Extension adapter - ENLAR-M-KV-M32/M40 - 1647682

Classifications

eCl@ss

eCl@ss 8.0	27439207
eCl@ss 9.0	27430314

ETIM

ETIM 2.0	EC000441
ETIM 3.0	EC000441
ETIM 4.0	EC000441
ETIM 5.0	EC000938
ETIM 6.0	EC000938
ETIM 7.0	EC000938

UNSPSC

UNSPSC 6.01	30211808
UNSPSC 7.0901	39121408
UNSPSC 11	39121408
UNSPSC 12.01	39121408
UNSPSC 13.2	39121408