

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



USB socket insert, 4-pos., socket USB type B on flat-ribbon cable terminal strip, pitch 2.54, for the Freenet system in the panel mounting frame, IP20 terminal outlet, 19" patch panel and service interface





Key Commercial Data

Packing unit	1 pc
GTIN	4 017918 970192
GTIN	4017918970192
Weight per Piece (excluding packing)	16.300 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Ambient conditions

Ambient temperature (operation)	-15 °C 65 °C

General data

Number of positions	4
Rated voltage (III/3)	30 V
Connection method	Flat-ribbon cable connection, pitch 2.54 mm
Contact material	Copper alloy
Contact carrier material	Thermoplastic
Contact surface material	Gold over nickel
Housing material	PC
Degree of protection	IP20
Rated current	1 A




Technical data

Standards and Regulations

Flammability rating according to UL 94	V0
Environmental Product Compliance	
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Schematic diagram

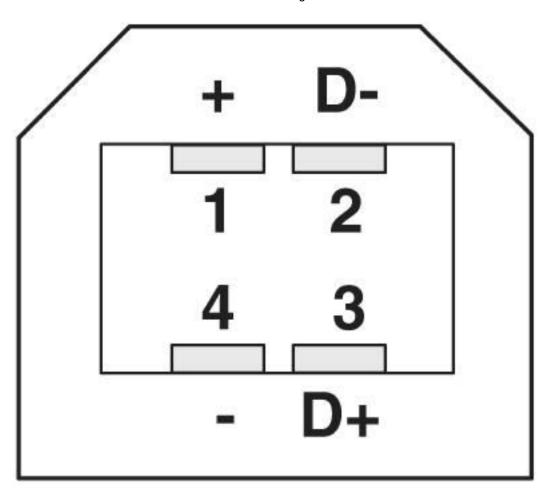

Pin assignment socket USB, type B



Classifications

eCl@ss

eCl@ss 10.0.1	27440205
eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27261200
eCl@ss 6.0	27261200
eCl@ss 7.0	27440205
eCl@ss 8.0	27440205
eCl@ss 9.0	27440205

ETIM

ETIM 2.0	EC000830
ETIM 3.0	EC001855
ETIM 4.0	EC001855
ETIM 5.0	EC000438
ETIM 6.0	EC000438
ETIM 7.0	EC000438

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	39121522
UNSPSC 18.0	39121522
UNSPSC 19.0	39121522
UNSPSC 20.0	39121522
UNSPSC 21.0	39121522

Approvals

Approvals

Approvals

EAC

Ex Approvals



Approvals

Approval details

EAC

EHC

B.01687

Accessories

Accessories

Data cable preassembled

USB cable - VS-04-C-SDA/PH/0,3 - 1405552



USB cable, with USB connectors at one end, assembled connector type: A, single post connector, length: 0.3 m

USB cable - VS-04-C-SDB/PH/0,3 - 1405565



USB cable, with USB connectors at one end, assembled connector type: B, single post connector, length: 0.3 m

Panel mounting frame

Panel mounting frames - VS-A-F-IP67 - 1653744



Panel mounting frame, IP67, for Freenet system, for round panel cutout, with grommet, without mounting screws, color: gray

Phoenix Contact 2020 © - all rights reserved http://www.phoenixcontact.com