

## RJ45 bending protection sleeve - VS-08-KS-H/GN - 1654756

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


RJ45 bend protection sleeve, for pin inserts VS-08-ST-H11-RJ45 and VS-08-ST-H21-RJ45, for cable cross section up to 7 mm, color: green



RoHS IP20

Ethernet

### Key Commercial Data

Packing unit	1 pc
Minimum order quantity	5 pc
GTIN	 4 017918 977818
GTIN	4017918977818
Weight per Piece (excluding packing)	2.280 g
Custom tariff number	39269097
Country of origin	China

### Technical data

#### Mechanical characteristics

Maximum external conductor diameter	7 mm
Weight	2.13 g
Flammability rating according to UL 94	V0

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
---------------------------------	------------------

#### Material data

Housing material	PA
Width	29.5 mm
Height	17 mm

# RJ45 bending protection sleeve - VS-08-KS-H/GN - 1654756

## Technical data

### Material data

Length	13.5 mm
--------	---------

### Standards and Regulations


Flammability rating according to UL 94	V0
--	----

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Dimensional drawing

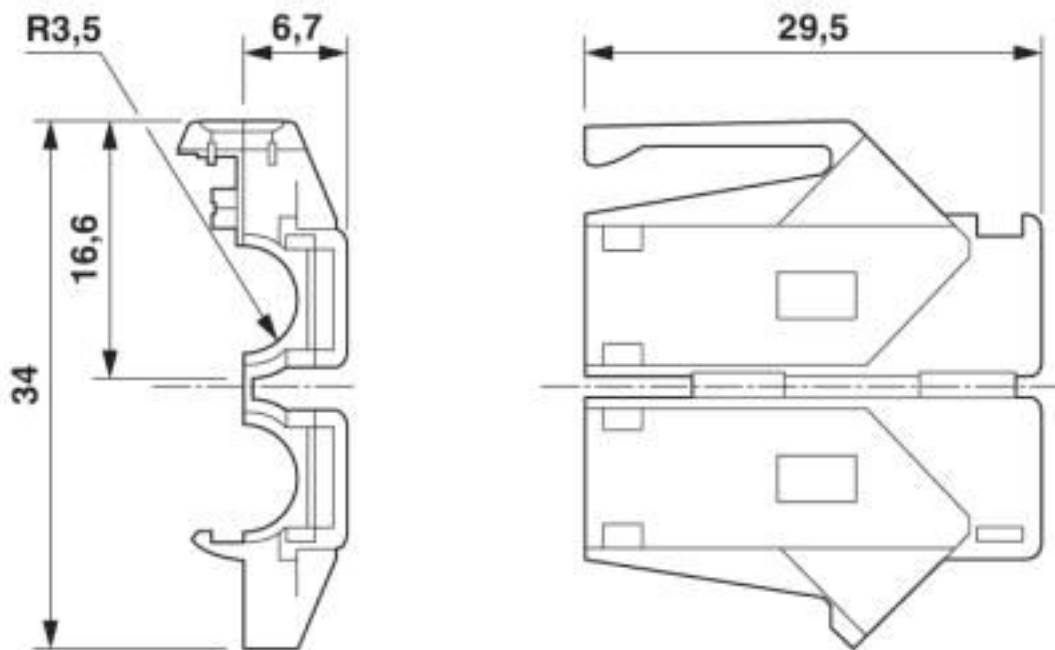

RJ45 bending protection sleeve

## Classifications

eCl@ss

eCl@ss 10.0.1	27440212
eCl@ss 4.0	27140900
eCl@ss 4.1	27140900
eCl@ss 5.0	27140900

## RJ45 bending protection sleeve - VS-08-KS-H/GN - 1654756

### Classifications

#### eCl@ss

eCl@ss 5.1	27140900
eCl@ss 6.0	27140900
eCl@ss 7.0	27439224
eCl@ss 8.0	27440212
eCl@ss 9.0	27440212

#### ETIM

ETIM 2.0	EC000307
ETIM 3.0	EC001680
ETIM 4.0	EC001680
ETIM 5.0	EC001680
ETIM 6.0	EC001680
ETIM 7.0	EC001679

#### UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

### Approvals

#### Approvals

---

Approvals


EAC

---

Ex Approvals

---

#### Approval details

EAC		B.01742
-----	---	---------

## RJ45 bending protection sleeve - VS-08-KS-H/GN - 1654756

### Accessories

#### Accessories

#### Male insert

RJ45 male insert - VS-08-ST-H11-RJ45 - 1652716



RJ45 pin insert, CAT5, 8-pos., shielded, IDC connection technology, for 27 ... 26 AWG litz wires, with strain relief

---

RJ45 male insert - VS-08-ST-H21-RJ45 - 1652729



RJ45 male insert, CAT6, 8-pos., shielded, IDC displacement connection, for litz wire AWG 25 ... 24 and solid wires AWG 24, with strain relief

---