

## Adapter - HC-NPT-1 1/4-M40 - 1687587


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



NPT adapter, IP68, up to 5 bar, incl. O-ring seal, M40 to 1 1/4"



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 822736
GTIN	4017918822736
Weight per Piece (excluding packing)	90.820 g
Custom tariff number	74199990
Country of origin	Germany

### Technical data

#### Dimensions

Length	26 mm
Length without connecting thread	18 mm
Connecting thread diameter	40 mm
Length of the connecting thread	8 mm

#### Ambient conditions

Degree of protection (IP)	IP68 (Depends on the screw connection used)
Ambient temperature (operation)	-20 °C ... 80 °C

#### General

Material	Brass, nickel-plated
O-ring material	NBR

## Adapter - HC-NPT-1 1/4-M40 - 1687587

### Technical data

#### General

Thread type on connection side	M40
Thread type on seal side	1 1/4 in. NPT
Color	silver


#### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

### Drawings

# Adapter - HC-NPT-1 1/4-M40 - 1687587

Dimensional drawing

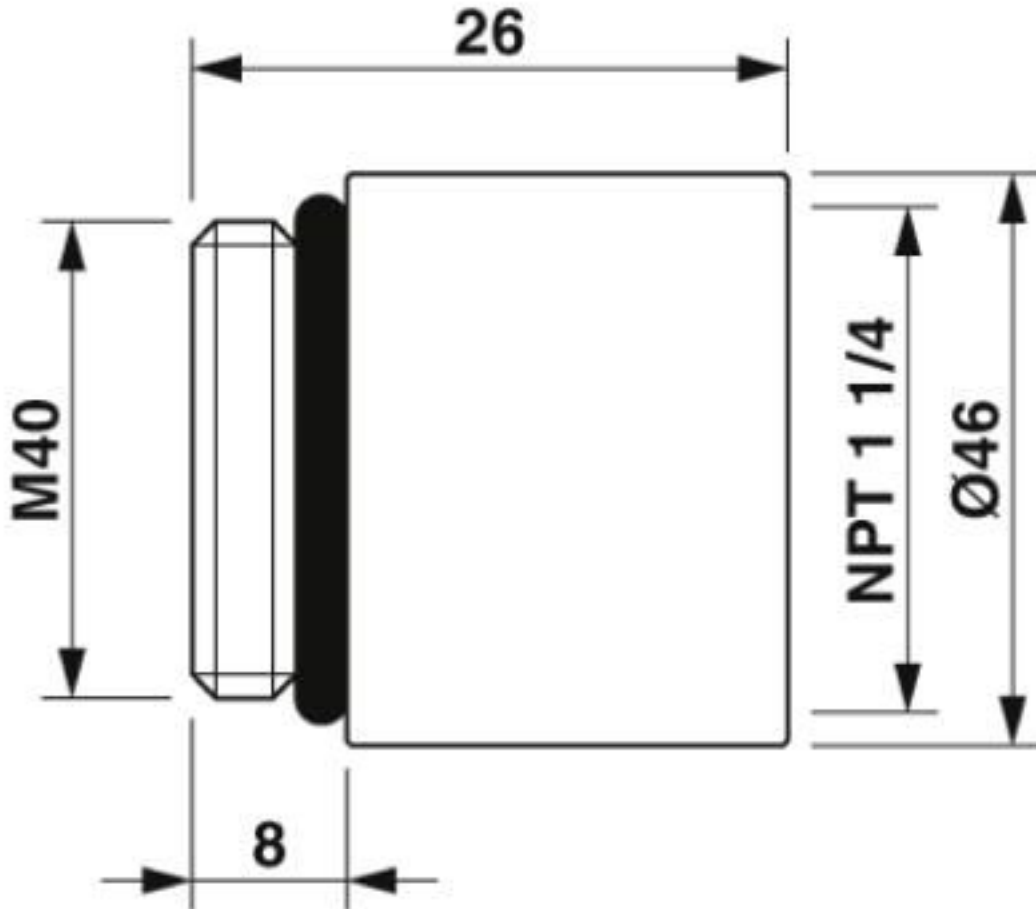

Dimensional drawing

## Classifications

eCl@ss

eCl@ss 10.0.1	27430314
eCl@ss 4.0	27141200
eCl@ss 4.1	27141200
eCl@ss 5.0	27149100
eCl@ss 5.1	27149100
eCl@ss 6.0	27149100
eCl@ss 7.0	27439207
eCl@ss 8.0	27439207

# Adapter - HC-NPT-1 1/4-M40 - 1687587

## Classifications

eCl@ss

eCl@ss 9.0	27430314
------------	----------

## ETIM

ETIM 2.0	EC000441
ETIM 3.0	EC000441
ETIM 4.0	EC000441
ETIM 5.0	EC000938
ETIM 6.0	EC000938
ETIM 7.0	EC000938

## UNSPSC

UNSPSC 6.01	31261502
UNSPSC 7.0901	31261502
UNSPSC 11	31261502
UNSPSC 12.01	31261502
UNSPSC 13.2	31261502

## Approvals

Approvals

---

Approvals

EAC

---

Ex Approvals

---

## Approval details

EAC		RU C- DE.AI30.B.01102
-----	---	--------------------------