

Inline function terminal - IB IL PM 3P/N/EF-PAC - 2700965

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Inline power measurement terminal for direct measurement of AC currents up to 5 A, including neutral conductor current and phase conductor voltages up to 400 V AC (phase/neutral conductor) or 690 V AC (phase/phase) complete with accessories (connectors and labeling fields)

Your advantages

- ✓ 4 inputs, 1 A AC ... 5 A AC for phase currents and neutral conductor currents
- ✓ 3 inputs for outer conductor voltages up to 690 V AC, supports direct connection
- ✓ Triggers for meas. intervals can be freely defined
- ✓ Harmonics analysis
- ✓ Determination of maximum values
- ✓ Operating hours counter
- ✓ Power meter
- ✓ Bimetal filtering
- ✓ Short-time control

RoHS

Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 665919
GTIN	4046356665919
Weight per Piece (excluding packing)	240.000 g
Custom tariff number	85389099
Country of origin	Germany

Technical data

Dimensions

Width	48.8 mm
-------	---------

Inline function terminal - IB IL PM 3P/N/EF-PAC - 2700965

Technical data

Dimensions

Height	119.8 mm
Depth	71.5 mm
Note on dimensions	Housing dimensions

Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)
Permissible humidity (storage/transport)	10 % ... 95 % (according to DIN EN 61131-2)
Air pressure (operation)	80 kPa ... 106 kPa (up to 2000 m above sea level)
Air pressure (storage/transport)	80 kPa ... 106 kPa (up to 2000 m above sea level)
Degree of protection	IP20

General

Mounting type	DIN rail
Net weight	200 g
Note on weight specifications	with connectors
Operating mode	Process data mode with 12 words, PCP with 2 words

Interfaces

Designation	Inline local bus
Connection method	Inline data jumper
Transmission speed	500 kbps

Inline potentials

Designation	Communications power (U_L)
Supply voltage	7.5 V DC (via voltage jumper)
Current consumption	typ. 78 mA
	max. 90 mA (all connections of the serial interface are short-circuited)

Standards and Regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Inline function terminal - IB IL PM 3P/N/EF-PAC - 2700965


Connection diagram

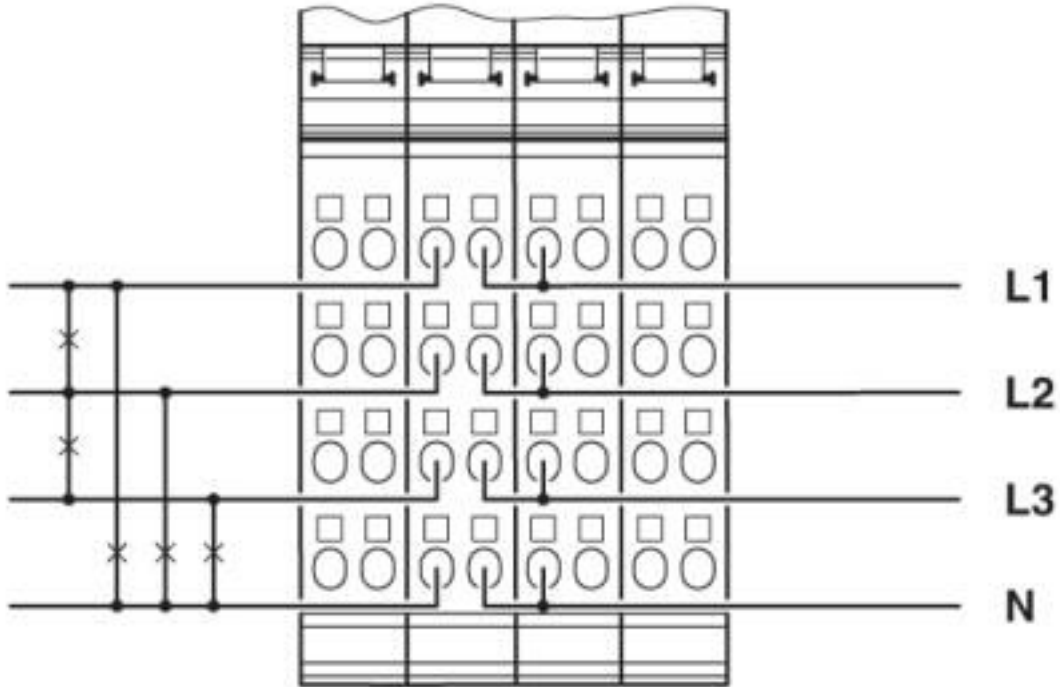

Direct connection

Inline function terminal - IB IL PM 3P/N/EF-PAC - 2700965

Dimensional drawing

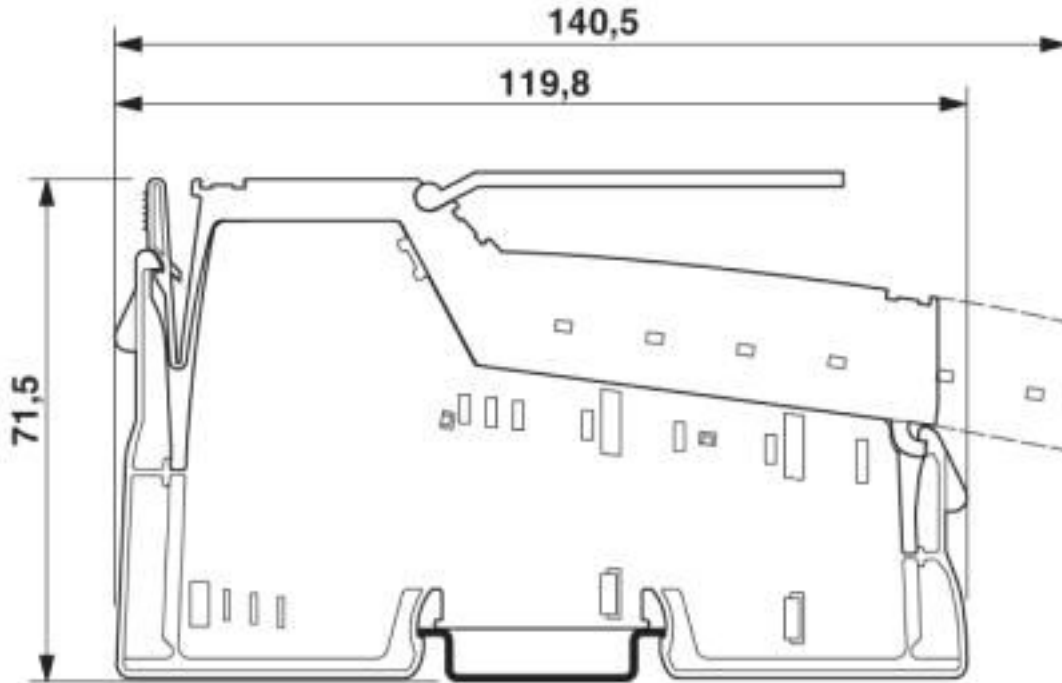

Classifications

eCl@ss

eCl@ss 10.0.1	27242605
eCl@ss 4.0	27250300
eCl@ss 4.1	27250300
eCl@ss 5.0	27250300
eCl@ss 5.1	27242600
eCl@ss 6.0	27242600
eCl@ss 7.0	27242605
eCl@ss 8.0	27242605
eCl@ss 9.0	27242605

ETIM

ETIM 3.0	EC001599
ETIM 4.0	EC001601
ETIM 5.0	EC001601
ETIM 6.0	EC001601
ETIM 7.0	EC001601

Inline function terminal - IB IL PM 3P/N/EF-PAC - 2700965

Classifications

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	32151602
UNSPSC 18.0	32151602
UNSPSC 19.0	32151602
UNSPSC 20.0	32151602
UNSPSC 21.0	32151602

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		EAC-Zulassung
-----	--	---------------

Accessories

Accessories

Labeling panel

Labeling field - IB IL FIELD 8 - 2727515

Labeling field, width: 48.8 mm



Inline function terminal - IB IL PM 3P/N/EF-PAC - 2700965

Accessories

Labeling field - IB IL FIELD 2 - 2727501

Labeling field, width: 12.2 mm



Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>