

I/O module - IB ST ZF 24 BDI 16/4 - 2750730

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



INTERBUS-ST digital input module, 16 inputs, 24 V DC, 4-wire connection method, IP20 protection, consisting of: Terminal part with spring-cage connection and module electronics

The figure shows version IB ST 24
BDI 16/4

Product Description

INTERBUS ST standard digital input modules

The digital INTERBUS input modules are designed for the connection of digital control signals, such as those generated by switches, limit switches, electronic proximity switches, and photoelectric switches.

The scope of functions provided by the standard models covers the majority of applications.

All the typical advantages of INTERBUS ST handling, such as multi-wire connection method and plug-in electronics are available.

Your advantages

- 16 digital inputs
- Connection of sensors in 4-wire technology
- Spring-cage connection with direct plug-in technology

Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4017918132118
Weight per Piece (excluding packing)	663.700 g
Custom tariff number	85389091
Country of origin	Germany

Technical data

Note

I/O module - IB ST ZF 24 BDI 16/4 - 2750730

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	118 mm
Height	117 mm
Depth	116 mm

Ambient conditions

Ambient temperature (operation)	0 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Permissible humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Air pressure (operation)	80 kPa ... 106 kPa (up to 2000 m above sea level)
Air pressure (storage/transport)	80 kPa ... 106 kPa (up to 2000 m above sea level)
Degree of protection	IP20

Interfaces

Designation	ST local bus
Connection method	ST local bus connector
Transmission speed	500 kbps

Digital inputs

Input name	Digital inputs
Connection method	Spring-cage connection
Connection technology	4-wire
Number of inputs	16
Typical response time	50 µs
Nominal input current at U_{IN}	typ. 6 mA (per channel)
Input voltage	24 V DC
Input voltage range "0" signal	-30 V DC ... 5 V DC
Input voltage range "1" signal	15 V DC ... 30 V DC

Power supply for module electronics

Supply voltage	24 V DC
Supply voltage range	20 V DC ... 30 V DC (including ripple)
Ripple	3.6 V _{pp} within the allowable voltage range
Current consumption	typ. 100 mA

General

Mounting type	DIN rail
---------------	----------

I/O module - IB ST ZF 24 BDI 16/4 - 2750730

Technical data

General

Net weight	662 g
Mounting position	Horizontal DIN rail

Electrical isolation

Test section	Bus logic / I/O 500 V AC 50 Hz 1 min.
	Supply voltage logic / I/O 500 V AC 50 Hz 1 min.

Standards and Regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings


I/O module - IB ST ZF 24 BDI 16/4 - 2750730

Dimensional drawing

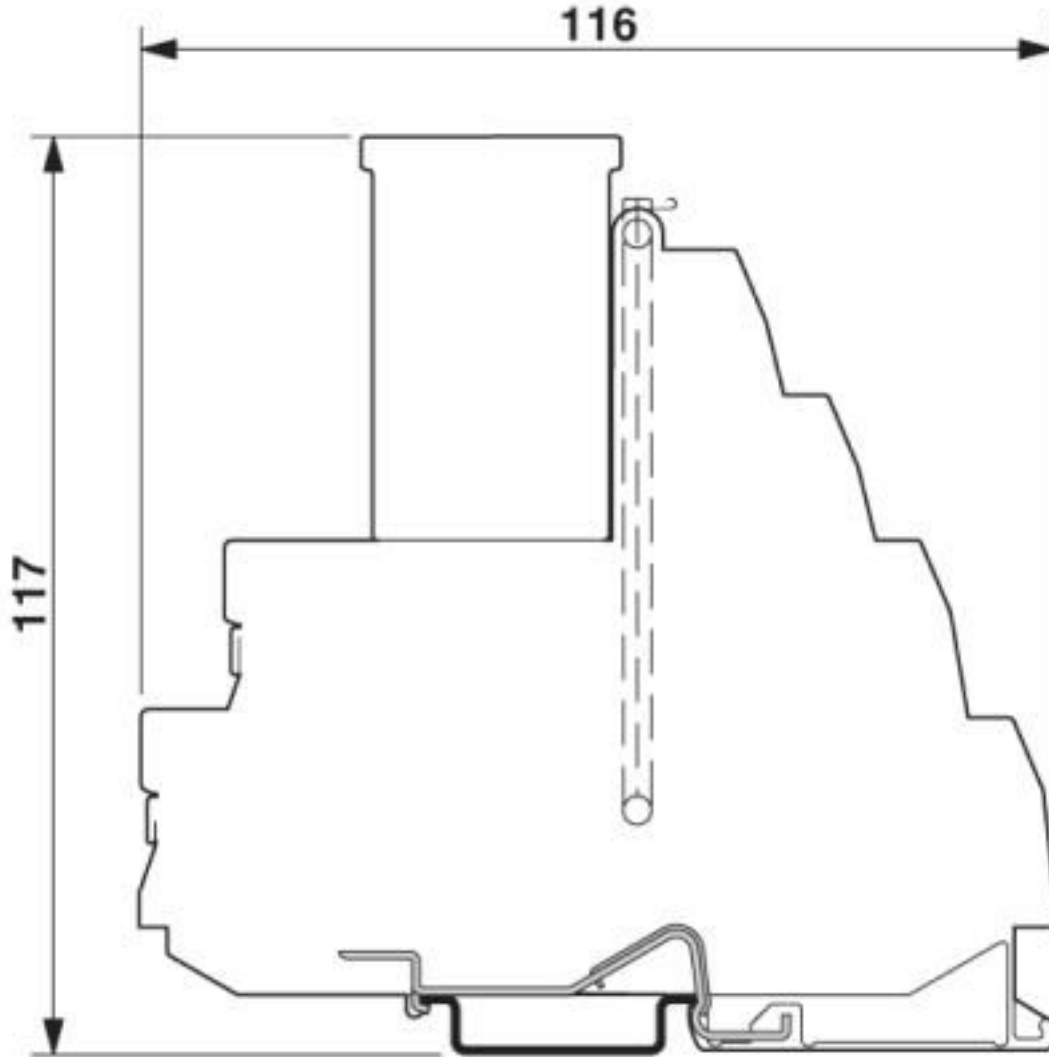

I/O module - IB ST ZF 24 BDI 16/4 - 2750730

Connection diagram

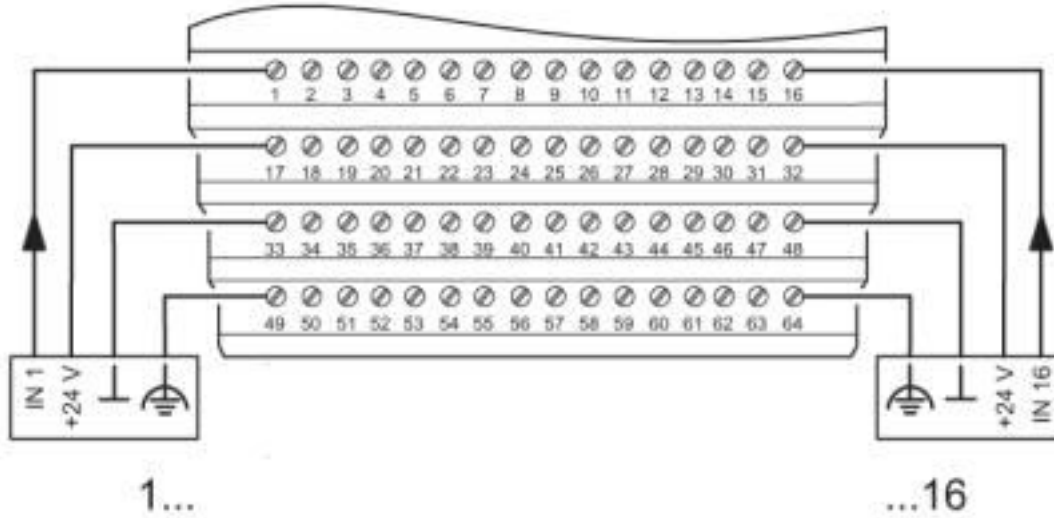

Classifications

eCl@ss

eCl@ss 10.0.1	27242604
eCl@ss 4.0	27250300
eCl@ss 4.1	27250300
eCl@ss 5.0	27250300
eCl@ss 5.1	27242600
eCl@ss 6.0	27242600
eCl@ss 7.0	27242604
eCl@ss 8.0	27242604
eCl@ss 9.0	27242604

ETIM

ETIM 2.0	EC001430
ETIM 3.0	EC001599
ETIM 4.0	EC001599
ETIM 5.0	EC001599
ETIM 6.0	EC001599
ETIM 7.0	EC001599

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015

I/O module - IB ST ZF 24 BDI 16/4 - 2750730

Classifications

UNSPSC

UNSPSC 12.01	43201404
UNSPSC 13.2	32151602
UNSPSC 18.0	32151602
UNSPSC 19.0	32151602
UNSPSC 20.0	32151602
UNSPSC 21.0	32151602

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		EAC-Zulassung
-----	--	---------------

Accessories

Accessories

Bridge

Jumper - IB ST LBC - 2836492



Spare local bus cable, for INTERBUS-ST modules

Fuse

I/O module - IB ST ZF 24 BDI 16/4 - 2750730

Accessories

Fuse - IBS TR5 1AT - 2806600



Replacement fuse, for INTERBUS-ST modules

Replacement electronics module - IB STME 24 BDI 16/4 - 2751687



Replacement module electronics for IB ST (ZF) 24 BDI 16/4

Replacement clamping part - IB STTB ZF 24 BDI16/4 - 2722580



Replacement clamping part for IB ST 24 BDI 16/4
