


## Surge protection device - UBK 2-500 - 2798530

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



DIN rail module with coarse surge protection for two signal wires. Self-contacting grounding foot for mounting on NS 32 or NS 35/7.5, housing width: 17.5 mm. Design: 500 V AC



### Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4017918073800
Weight per Piece (excluding packing)	60.010 g
Custom tariff number	85363010
Country of origin	Germany

### Technical data

#### Dimensions

Height	90 mm
Width	17.5 mm
Depth	46 mm (incl. DIN rail 7.5 mm)
Horizontal pitch	1 Div.

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 mm (amsl (above mean sea level))
Degree of protection	IP20

#### General

# Surge protection device - UBK 2-500 - 2798530

## Technical data

### General

Housing material	PA 6.6
Flammability rating according to UL 94	V-2
Color	jet black RAL 9005
Standards for clearances and creepage distances	IEC 60664-1
Mounting type	DIN rail: 35 mm
Type	DIN rail module, one-piece
Direction of action	Line-Earth Ground

### Protective circuit

IEC test classification	C2
	D1
Nominal voltage $U_N$	500 V AC
Maximum continuous voltage $U_C$	500 V AC
Rated current	2 A
Operating effective current $I_C$ at $U_C$	$\leq 1 \mu\text{A}$
Residual current $I_{PE}$	$\leq 1 \mu\text{A}$
Nominal discharge current $I_n$ (8/20) $\mu\text{s}$ (line-line)	10 kA
Nominal discharge current $I_n$ (8/20) $\mu\text{s}$ (line-earth)	10 kA
Pulse discharge current $I_{imp}$ (10/350) $\mu\text{s}$	2.5 kA
Output voltage limitation at 1 kV/ $\mu\text{s}$ (line-line) static	$\leq 2.5 \text{ kV}$
	$\leq 2.7 \text{ kV}$ (4 kV (1.2/50) $\mu\text{s}$ )
Output voltage limitation at 1 kV/ $\mu\text{s}$ (line-earth) static	$\leq 1.5 \text{ kV}$
	$\leq 1.7 \text{ kV}$ (4 kV (1.2/50) $\mu\text{s}$ )
Voltage protection level $U_p$ (line-line)	3.5 kV (C2 - 10 kV / 5 kA)
Voltage protection level $U_p$ (line-earth)	2.2 kV (C2 - 10 kV / 5 kA)
	2.3 kV ( $I_{imp}$ -2.5 kA)
Response time $t_A$ (line-line)	$\leq 100 \text{ ns}$
Response time $t_A$ (line-earth)	$\leq 100 \text{ ns}$
Input attenuation aE, sym.	typ. 0 dB ( $\leq 30 \text{ MHz} / 50 \Omega$ )
Cut-off frequency $f_g$ (3 dB), sym. in 50 Ohm system	typ. 60 MHz
Capacity (line-line)	typ. 7 pF
Max. required back-up fuse	2 A (gL)
Impulse durability (line-line)	C2 - 10 kV / 5 kA
Impulse durability (line-earth)	C2 - 10 kV / 5 kA
	D1 - 2.5 kA
Alternating current carrying capacity (line-line)	10 A - 1 s
Alternating current carrying capacity (line-earth)	10 A - 1 s

## Surge protection device - UBK 2-500 - 2798530

### Technical data

#### Connection data

Connection method	Screw connection
Screw thread	M3
Tightening torque	0.5 Nm ... 0.6 Nm
Stripping length	8 mm
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section solid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12

#### Standards and Regulations


Standards/specifications	IEC 61643-21 2000 + A1:2008
	EN 61643-21 2001 + A1:2009

#### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


### Drawings

Dimensional drawing

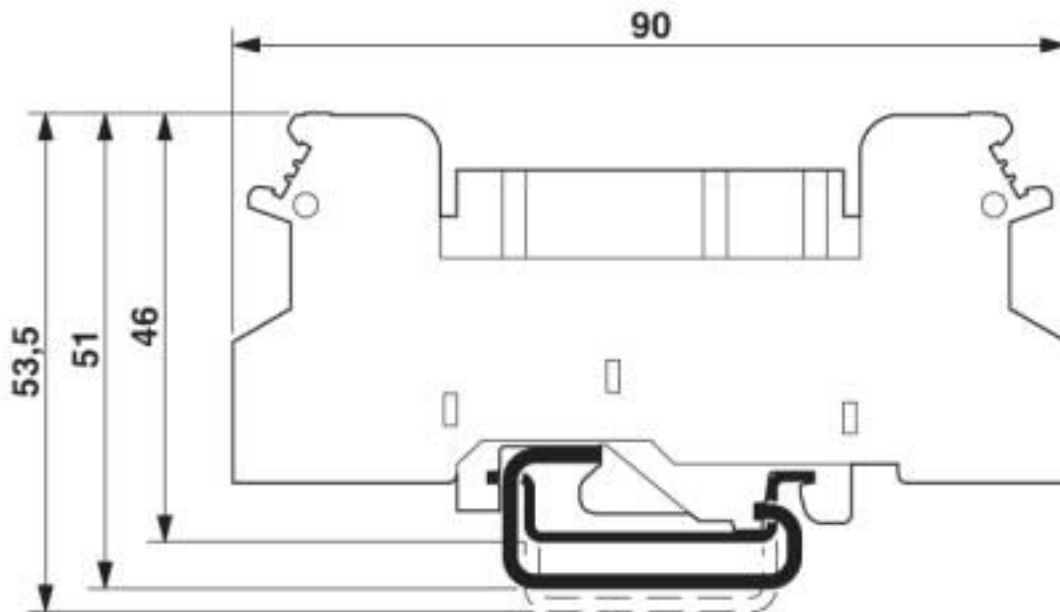

## Surge protection device - UBK 2-500 - 2798530

Circuit diagram

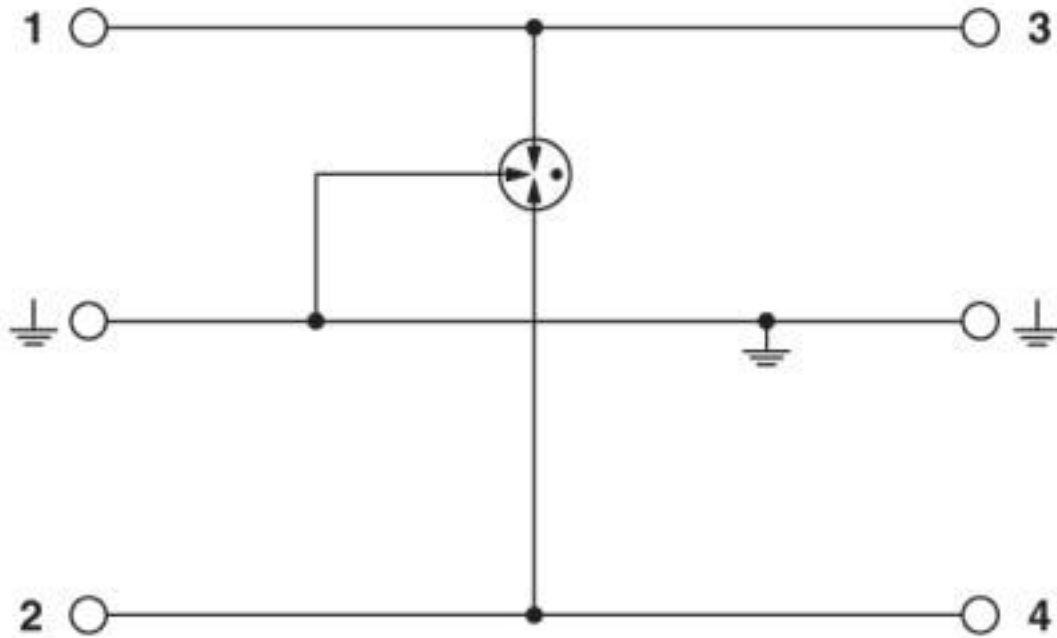

### Classifications

eCl@ss

eCl@ss 10.0.1	27130807
eCl@ss 4.0	27130800
eCl@ss 4.1	27130800
eCl@ss 5.0	27130800
eCl@ss 5.1	27130800
eCl@ss 6.0	27130800
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807
eCl@ss 9.0	27130807

ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943
ETIM 6.0	EC000943
ETIM 7.0	EC000943

## Surge protection device - UBK 2-500 - 2798530

### Classifications

#### UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620
UNSPSC 18.0	39121620
UNSPSC 19.0	39121620
UNSPSC 20.0	39121620
UNSPSC 21.0	39121620

### Approvals

#### Approvals

---

Approvals


EAC

---

Ex Approvals

---

#### Approval details

EAC		RU C- DE.A*30.B01561
-----	---	-------------------------

---