

## Surge protection plug - CTM 2X1-110AC - 2838526


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




LSA-PLUS plug (COMTRAB CTM) with protective circuit for 2-conductor signal circuits grounded on one side.  
Nominal voltage: 110 V AC

### Your advantages

- ✓ The CTM 10-MAG surge protection magazine can be freely fitted with various protective plugs
- ✓ Can be used in LSA-PLUS disconnect and control strips or CT-TERMIBLOCK
- ✓ Typical installation locations include marshalling distributors
- ✓ Space-saving LSA-PLUS connection technology
- ✓ Modular compact protection for high-density networks



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 819552
GTIN	4017918819552
Weight per Piece (excluding packing)	10.300 g
Custom tariff number	85363010
Country of origin	Germany

### Technical data

#### Dimensions

Height	21 mm
Width	9.4 mm
Depth	52.4 mm

#### Ambient conditions

## Surge protection plug - CTM 2X1-110AC - 2838526

### Technical data

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 75 °C
Altitude	≤ 2000 m (amsl (above mean sea level))
Degree of protection	IP20

#### General

Housing material	PA 6.6
Flammability rating according to UL 94	V-0
Color	jet black RAL 9005
Overvoltage category	II
Degree of pollution	2
Mounting type	On CT-TERMIBLOCK and LSA-PLUS disconnect strip
Type	LSA-PLUS module
Direction of action	Line-Line & Line-Earth Ground
Arrester can be tested with CHECKMASTER from software version:	From SW rev. 1.10

#### Protective circuit

IEC test classification	B2
	C1
	C2
	C3
	D1
Nominal voltage $U_N$	110 V AC
Maximum continuous voltage $U_C$	60 V DC
	125 V AC
Rated current	380 mA AC (25 °C)
	150 mA DC (25 °C)
Operating effective current $I_C$ at $U_C$	≤ 5 μA (per path)
Residual current $I_{PE}$	≤ 5 μA (per path)
Nominal discharge current $I_n$ (8/20) μs (line-earth)	5 kA
Pulse discharge current $I_{imp}$ (10/350) μs (line-earth)	1 kA
Total discharge current $I_{total}$ (8/20) μs	10 kA
Total discharge current $I_{total}$ (10/350) μs	2.5 kA
Nominal pulse current $I_{an}$ (10/1000) μs (line-earth)	100 A
Output voltage limitation at 1 kV/μs (line-earth) spike	≤ 260 V
Output voltage limitation at 1 kV/μs (line-earth) static	≤ 15 V
Residual voltage at $I_n$ (line-earth)	≤ 10 V
Residual voltage with $I_{an}$ (10/1000) μs (line-earth)	≤ 10 V
Voltage protection level $U_p$ (line-earth)	≤ 260 V (C2 - 10 kV / 5 kA)

## Surge protection plug - CTM 2X1-110AC - 2838526

### Technical data

#### Protective circuit

	≤ 260 V (C3 - 100 A)
Voltage protection level $U_p$ static (line-earth)	≤ 10 V (C2 - 10 kV / 5 kA)
	≤ 10 V (C3 - 100 A)
Response time $t_A$ (line-earth)	≤ 1 ns
Input attenuation aE, asym.	typ. 0.3 dB (≤ 3 MHz / 100 Ω)
Cut-off frequency $f_g$ (3 dB), asym. (PE) in 100 Ohm system	typ. 20 MHz
Capacity (line-earth)	typ. 100 pF
Resistance per path	3.3 Ω 20 %
Surge protection fault message	none
Max. required back-up fuse	150 mA (T/IEC 60127-2/3)
Impulse durability (line-earth)	B2 - 4 kV / 100 A
	C2 - 10 kV / 5 kA
	C3 - 100 A
	D1 - 1 kA
Alternating current carrying capacity (line-earth)	5 A - 1 s

#### Connection data

Connection method	can be plugged into COMTRAB-TERMIBLOCK and LSA-PLUS disconnect and switching strips
Connection method IN	COMTRAB plug-in system
Connection method OUT	COMTRAB plug-in system
Connection technology	LSA-PLUS

#### Connection, equipotential bonding

Connection method	Spring contact
-------------------	----------------

#### Standards and Regulations

Standards/specifications	IEC 61643-21 2000 + corrigendum 2001 + A1:2008, modified + A2:2012
	EN 61643-21 2001 + A1:2009 + A2:2013


#### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

### Drawings


## Surge protection plug - CTM 2X1-110AC - 2838526

Diagram

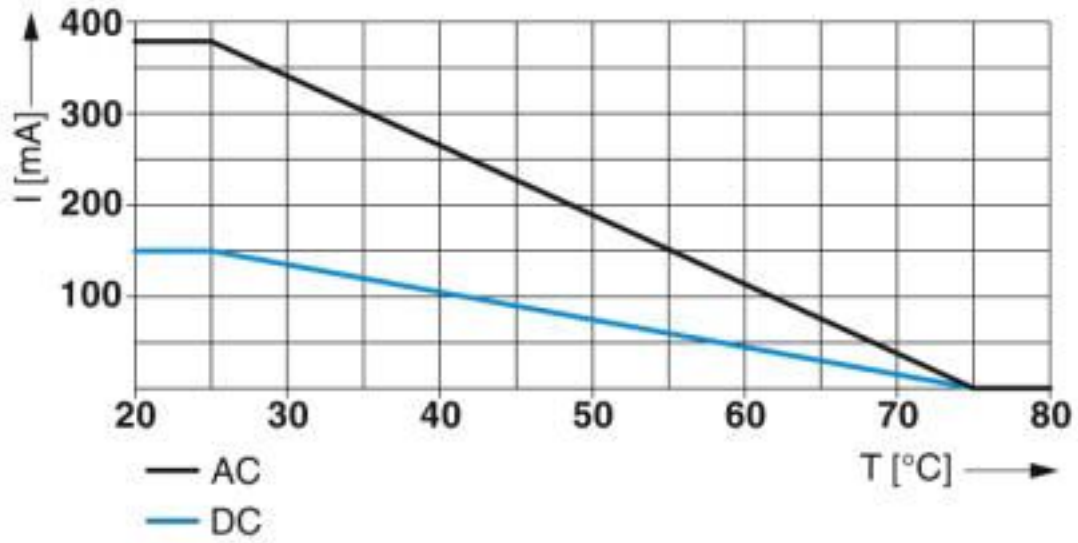


# Surge protection plug - CTM 2X1-110AC - 2838526

Dimensional drawing

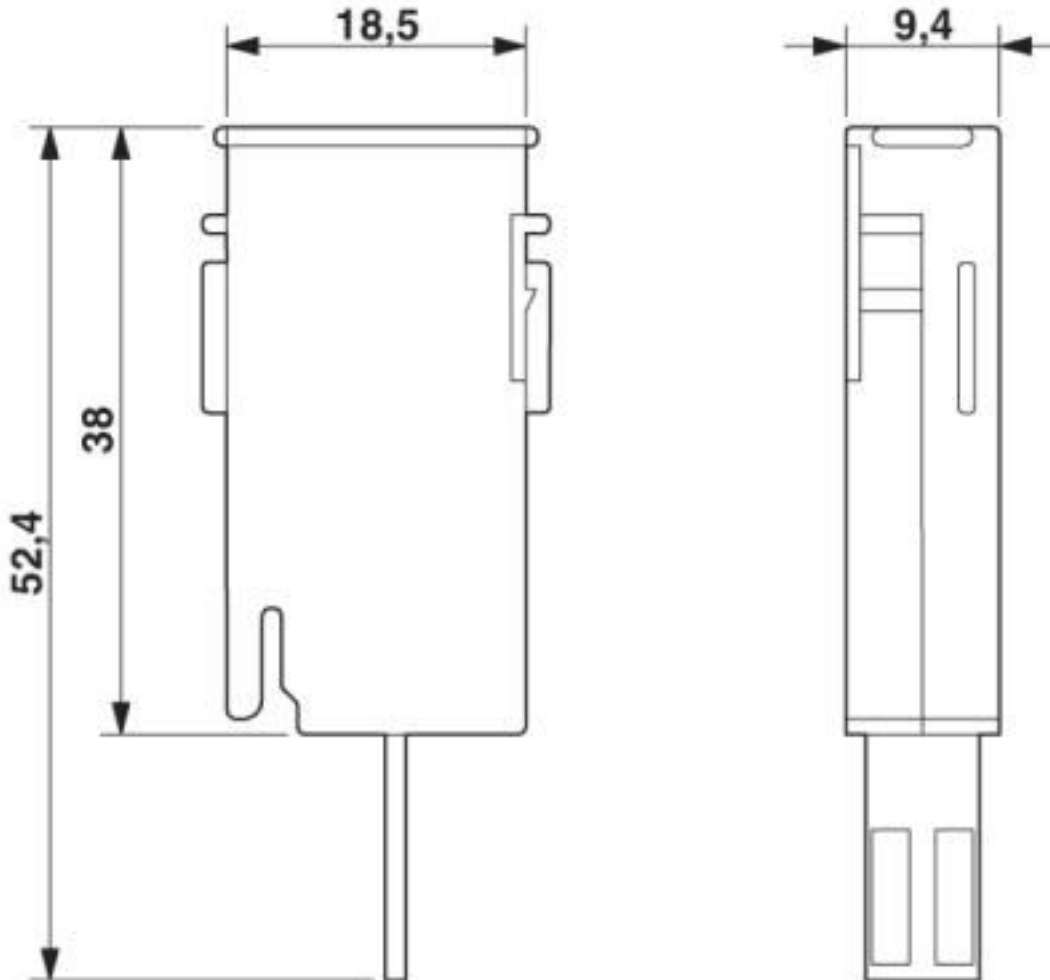

## Surge protection plug - CTM 2X1-110AC - 2838526

Circuit diagram

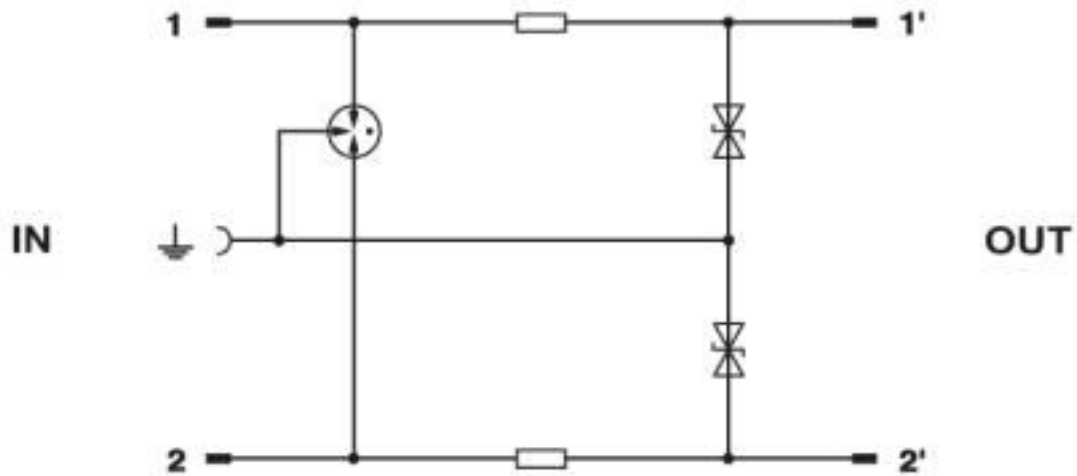

### Classifications

#### eCl@ss

eCl@ss 10.0.1	27130807
eCl@ss 4.0	27130800
eCl@ss 4.1	27130800
eCl@ss 5.0	27130800
eCl@ss 5.1	27130800
eCl@ss 6.0	27130800
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807
eCl@ss 9.0	27130807

#### ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943
ETIM 6.0	EC000943
ETIM 7.0	EC000943

#### UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610

# Surge protection plug - CTM 2X1-110AC - 2838526

## Classifications

### UNSPSC

UNSPSC 13.2	39121620
UNSPSC 18.0	39121620
UNSPSC 19.0	39121620
UNSPSC 20.0	39121620
UNSPSC 21.0	39121620

## Approvals

### Approvals

---

Approvals

UL Listed / EAC / EAC

---

Ex Approvals

### Approval details

UL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 138168
-----------	--	---	---------------

EAC		EAC-Zulassung
-----	--	---------------

EAC		RU C- DE.A*30.B01561
-----	--	-------------------------

## Accessories

Necessary add-on products

## Surge protection plug - CTM 2X1-110AC - 2838526

### Accessories

#### Disconnect strip - CT 10-TL - 2765356



LSA-PLUS disconnect strip to hold the CTM and CT 10 protection modules. Version: 10 double conductors, dimension A: 124 mm.

---

#### Grounding rail - CT 1-10-ES - 2765547



Ground rail for CTM protective plug when used in combination with LSA-PLUS disconnect strip. Version: 10 double conductors

---

#### Screw termination block - CT-TERMIBLOCK 10 DA - 0441711



Screw termination block with disconnect contacts for accommodating protective plugs CT and CTM. Use in MCR and telecommunications systems. Design: 10 double wires

---

#### Magazine - CTM 10-MAG - 2838610



Magazine with a grounding rail to accommodate up to 10 LSA-PLUS protective plugs (COMTRAB CTM), to insert in CT-TERMIBLOCK or LSA-PLUS disconnect strip

---

### Additional products

#### Mounting clip - CT 10-MB/ 3 - 2765372



Mounting clip, for holding 3 disconnect or ground wire strips. Version: 10 double conductors, dimensions: A 104.5 mm, B 65 mm.

---



## Surge protection plug - CTM 2X1-110AC - 2838526

### Accessories

Mounting clip - CT 10-MB/10 - 2765385



Mounting clip, for holding 10 disconnect or ground wire strips. Version: 10 double conductors, dimensions: A 104.5 mm, dimensions B 245.5 mm

Cable feed-through sleeve - CT-KDT - 2765518



Cable bush for assembly troughs, for protection of the lines guided through the laminated frame

Short-circuit connector - CTM EST - 2838649



LSA-PLUS grounding plug (COMTRAB CTM) to short-circuit and ground potentials in CT-TERMIBLOCK... and disconnect strip CT 10...

Shield connection - SSA 3-6 - 2839295



Shield fast connection for 3 ... 6 mm cable diameter. Potential connecting cable: 200 mm, 1 mm<sup>2</sup>, color: black

Shield connection - SSA 5-10 - 2839512



Shield fast connection for 5 ... 10 mm cable diameter. Potential connecting cable: 200 mm, 1 mm<sup>2</sup>, color: black

