

Industrial Ethernet Switch - FL SWITCH 3004T-FX - 2891033

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Managed Ethernet switch with four RJ45 ports at 10/100 Mbps, one SC format fiber optic port and operating temperature of -40°C ... +75°C

Product Description

FL SWITCH 3000 managed industrial Ethernet switches combine extensive network performance and security features with complete IEEE redundancy (STP/RSTP/MST) and 15 ms recovery time extended ring redundancy. Unique web customization provides a simplified user interface for today's applications and scalable functionality for future needs. A comprehensive mix of fiber optic and copper port connections meets a wide range of applications.

Your advantages

- ✓ Unique cleanup function hides unused configuration pages, reducing complexity, maintenance and startup times
- ✓ Auto negotiation and autocrossing detection simplifies installation and setup
- ✓ Security options with cable locking
- ✓ Secure web-based and SNMP-based management
- ✓ Extensive web diagnostics with configurable LED and remote alarm contacts
- ✓ RJ45 ports support a transmission speed of 10/100 Mbps; fiber optic ports support 100 Mbps
- ✓ -40 to 75°C and -10 to 60°C ambient temperature versions

Key Commercial Data

| | |
|--------------------------------------|---------------------|
| Packing unit | 1 pc |
| GTIN | 4 046356 659147 |
| GTIN | 4046356659147 |
| Weight per Piece (excluding packing) | 1,250.000 g |
| Custom tariff number | 85176200 |
| Country of origin | Taiwan |

Industrial Ethernet Switch - FL SWITCH 3004T-FX - 2891033

Technical data

Note

| | |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

Dimensions

| | |
|--------|----------|
| Width | 54.4 mm |
| Height | 146.4 mm |
| Depth | 125 mm |

Ambient conditions

| | |
|--|--|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -40 °C ... 75 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Permissible humidity (operation) | 5 % ... 95 % (non-condensing) |
| Permissible humidity (storage/transport) | 5 % ... 95 % (non-condensing) |
| Air pressure (operation) | 57 kPa ... 108 kPa (up to 4850 m above mean sea level) |
| Air pressure (storage/transport) | 57 kPa ... 108 kPa (up to 4850 m above mean sea level) |

Interfaces

| | |
|-------------------------------|--|
| Interface | Ethernet (RJ45) |
| No. of ports | 4 (RJ45 ports) |
| Note on the connection method | Auto negotiation and autocrossing |
| Transmission physics | Ethernet in RJ45 twisted pair |
| Transmission speed | 10/100 Mbps |
| Transmission length | 100 m |
| Interface | Fiber optic interface |
| No. of ports | 1 (SC multi-mode) |
| Transmission physics | multi-mode fiberglass |
| Transmission speed | 100 Mbps (full duplex) |
| Transmission length | 12.1 km (fiberglass with F-G 62.5/125 0.7 dB/km F1000) |
| | 3.3 km (fiberglass with F-G 62.5/125 2.6 dB/km F600) |
| | 7.1 km (fiberglass with F-G 50/125 0.7 dB/km F1200) |
| | 3.1 km (fiberglass with F-G 50/125 1.6 dB/km F800) |
| Wavelength | 1300 nm |

Function

| | |
|-----------------|--|
| Basic functions | Store and forward switch, Extended Ring and IEEE redundancy, Multicast control, IGMP snooping, trunking, Port and Tagging VLANs, Port and IEEE 802.1x security, SNMP V3 and Https security, SNTP, web customization, user accounts |
| Redundancy | ERR (Extended ring redundancy) |

Industrial Ethernet Switch - FL SWITCH 3004T-FX - 2891033

Technical data

Function

| | |
|----------------------------------|--|
| Status and diagnostic indicators | LEDs: U _{S1} , U _{S2} (redundant voltage supply), link and activity per port |
| Signal contact control voltage | 250 V AC |
| Signal contact control current | 1 A |

Network expansion parameters

| | |
|---|--|
| Cascading depth | Network, linear, and star structure: any |
| Maximum conductor length (twisted pair) | 100 m |

Supply voltage

| | |
|-----------------------------|--|
| Supply voltage | 24 V DC (redundant) |
| Residual ripple | 3.6 V _{PP} (within the permitted voltage range) |
| Supply voltage range | 12 V DC ... 48 V DC |
| Typical current consumption | 230 mA (at U _S = 24 V DC) |
| Inrush current | 9.2 A (2 ms) |

General

| | |
|------------------|---|
| Mounting type | DIN rail |
| Type AX | Block design |
| Net weight | 1236.6 g |
| Housing material | Aluminum |
| MTTF | 39.7 Years (MIL-HDBK-217F standard, temperature 25°C, operating cycle 100%) |

Connection data

| | |
|---------------------------------------|--------------------------------------|
| Connection method | Pluggable COMBICON screw connections |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 12 |
| Stripping length | 7 mm |

Standards and Regulations

| | |
|--------------|--|
| Type of test | Shock in acc. with EN 60068-2-27/IEC 60068-2-27 |
| Test result | 25g, 11 ms half-sine shock pulse |
| Type of test | Vibration resistance in acc. with EN 60068-2-6/IEC 60068-2-6 |
| Test result | 5g, 150 Hz, Criterion 3 |
| Type of test | Free fall in acc. with IEC 60068-2-32 |
| Test result | 1 m |

Industrial Ethernet Switch - FL SWITCH 3004T-FX - 2891033

Technical data

Standards and Regulations


| | |
|----------------|------------------------------------|
| Noise emission | EN 61000-6-4 |
| Noise immunity | EN 61000-6-2:2005 |
| Conformance | CE-compliant |
| ATEX | # II 3 G Ex nA nC IIC T4 Gc |
| IECEX | Ex nA nC IIC T4 Gc |
| UL, USA/Canada | Class I, Div. 2, Groups A, B, C, D |

Environmental Product Compliance

| | |
|------------|---|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 10; |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Dimensional drawing

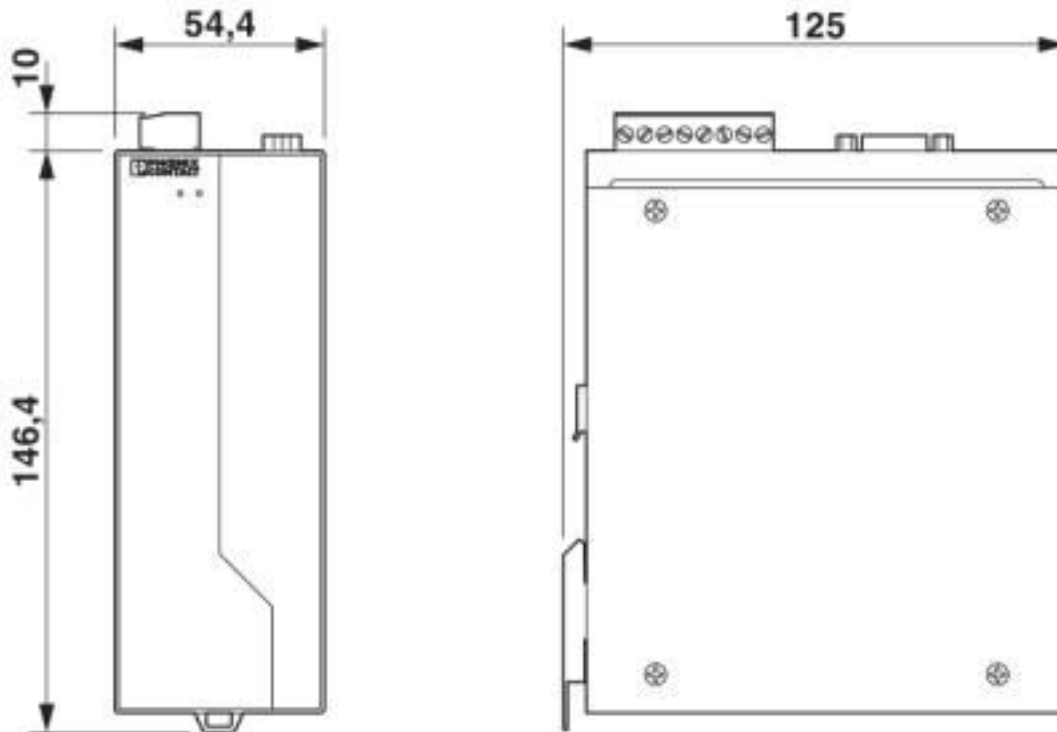

Industrial Ethernet Switch - FL SWITCH 3004T-FX - 2891033

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 19170401 |
| eCl@ss 4.0 | 27250500 |
| eCl@ss 4.1 | 27250500 |
| eCl@ss 5.0 | 19030100 |
| eCl@ss 5.1 | 19030100 |
| eCl@ss 6.0 | 19170100 |
| eCl@ss 7.0 | 19170106 |
| eCl@ss 8.0 | 19170106 |
| eCl@ss 9.0 | 19170106 |

ETIM

| | |
|----------|----------|
| ETIM 4.0 | EC000734 |
| ETIM 5.0 | EC000734 |
| ETIM 6.0 | EC000734 |
| ETIM 7.0 | EC000734 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 43172901 |
| UNSPSC 7.0901 | 43201404 |
| UNSPSC 11 | 43172015 |
| UNSPSC 12.01 | 43201410 |
| UNSPSC 13.2 | 43201410 |
| UNSPSC 18.0 | 43222612 |
| UNSPSC 19.0 | 43222612 |
| UNSPSC 20.0 | 43222612 |
| UNSPSC 21.0 | 43222612 |

Approvals

Approvals

Approvals

UL Listed / cUL Listed / EAC / EAC / cULus Listed

Ex Approvals

IECEX / ATEX / UL Listed / cUL Listed / cULus Listed

Industrial Ethernet Switch - FL SWITCH 3004T-FX - 2891033

Approvals

Approval details

| | | | |
|-----------|--|---|---------------|
| UL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 140324 |
|-----------|--|---|---------------|

| | | | |
|------------|--|---|---------------|
| cUL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 140324 |
|------------|--|---|---------------|

| | | | |
|-----|--|--|---------------|
| EAC | | | EAC-Zulassung |
|-----|--|--|---------------|

| | | | |
|-----|--|--|--------------------------|
| EAC | | | RU *- DE.A*08.B.00739 |
|-----|--|--|--------------------------|

| | | | |
|--------------|--|--|--|
| cULus Listed | | | |
|--------------|--|--|--|

Accessories

Accessories

Data cable preassembled

Patch cable - NBC-R4AC-R4AC-IE8A/.../... - 1411854



Patch cable, degree of protection: IP20, number of positions: 8, 10 Gbps, CAT6_A, cable outlet: straight

Patch cable - NBC-R4AC/10G-R4AC/10G-94F/2,0 - 1408360



Patch cable, CAT6_A, 4-pair, shielded, connection not crossed (line), assembled at both ends with RJ45/IP20 connectors, outer sheath material: PUR, length: 2.0 m

Industrial Ethernet Switch - FL SWITCH 3004T-FX - 2891033

Accessories

Patch cable - NBC-R4AC/10G-R4AC/10G-94F/3,0 - 1408365



Patch cable, CAT6_A, 4-pair, shielded, connection not crossed (line), assembled at both ends with RJ45/IP20 connectors, outer sheath material: PUR, length: 3.0 m

End block

End clamp - E/NS 35 N - 0800886



End clamp, width: 9.5 mm, color: gray

Mounting rail adapter

DIN rail adapter - FL DIN RA - 2891053



The FL DIN RA is installed in a standard, 19-inch rack (EIA-310-D, IEC 60297-3-100) to allow DIN rail mounted equipment to be rack mounted.

Patch cable

Patch cable - FL CAT5 PATCH 0,5 - 2832263



Patch cable, CAT5, assembled, 0.5 m

Industrial Ethernet Switch - FL SWITCH 3004T-FX - 2891033

Accessories

Patch cable - FL CAT5 PATCH 1,0 - 2832276



Patch cable, CAT5, assembled, 1 m

Patch cable - FL CAT5 PATCH 2,0 - 2832289



Patch cable, CAT5, assembled, 2 m

PCB plug

Printed-circuit board connector - MSTB 2,5/ 8-ST - 1754562



PCB connector, nominal current: 12 A, rated voltage (III/2): 320 V, nominal cross section: 2.5 mm², number of positions: 8, pitch: 5 mm, connection method: Screw connection with tension sleeve, color: green, contact surface: Tin

Protective cap

Dust protection - FL RJ45 PROTECT CAP - 2832991



Dust protection caps for RJ45 socket

Safety locking

Industrial Ethernet Switch - FL SWITCH 3004T-FX - 2891033

Accessories

Port Guard Security Element - FL SEC PAC 4TX - 2832865

Layer1 security elements for four RJ45 network connections for use with patch boxes and panels



Surge protection for information technology

Surge protection device - DT-LAN-CAT.6+ - 2881007



Surge protection in accordance with Class E_A (CAT6_A), for Gigabit Ethernet (up to 10 Gbps), token ring, FDDI/CDDI, ISDN, and DS1. Suitable for Power over Ethernet (PoE+) "Mode A" and "Mode B". RJ45 attachment plug with separate grounding cable and ground connection snap-on foot for NS 35 DIN rails.