

## Side element - UM 45-SEFE - 2907826

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Side element with foot, labeling with SS-ZB, mounted along the length of the DIN rail NS 35/7.5. Height: 36 mm, width: 10 mm, length: 45 mm.

### Your advantages

- ✓ UM ...-SES lateral element offers options for labeling with Phoenix Contact marking material
- ✓ Fast mounting
- ✓ Flexible size and shape
- ✓ Inexpensive as a result of reducing the number of separate housing parts
- ✓ High degree of mechanical stability by screwing the lateral elements to the profile
- ✓ The UMK-BF mounting flange enables modules to be mounted directly on the wall
- ✓ Cable fixing by means of UM ...-SEK lateral element (fixed using cable binders, not supplied as standard)

### Key Commercial Data

Packing unit	1 pc
Minimum order quantity	10 pc
GTIN	 4 017918 147976
GTIN	4017918147976
Weight per Piece (excluding packing)	4.580 g
Custom tariff number	39269097
Country of origin	Poland

### Technical data

#### Product properties

Brief article description	Side element
Type	UM 45-SEFE

## Side element - UM 45-SEFE - 2907826

### Technical data

#### Product properties

Order No.	2907826
Housing type	Panel mounting base
Type	Side cover

#### Dimensions

Depth [ d ]	45 mm
-------------	-------

#### Material specifications

Housing material	PA
------------------	----

#### Packaging specifications

Pieces per package	10
Denomination packing units	Pcs.

#### Standards and Regulations


Flammability rating according to UL 94	V0
--	----

#### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

### Drawings

Dimensional drawing

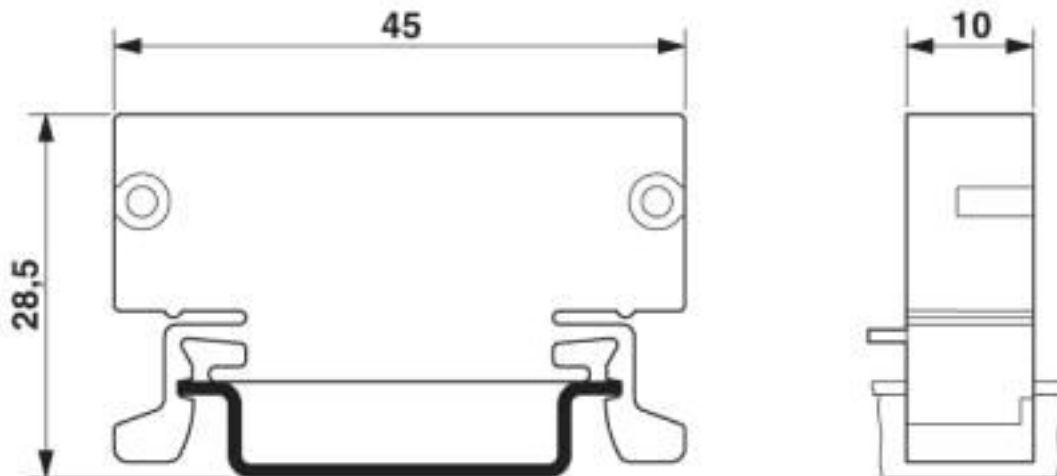

## Side element - UM 45-SEFE - 2907826

### Classifications

#### eCl@ss

eCl@ss 10.0.1	27182701
eCl@ss 4.0	27180400
eCl@ss 4.1	27180400
eCl@ss 5.0	27180500
eCl@ss 5.1	27180500
eCl@ss 6.0	27180800
eCl@ss 7.0	27182701
eCl@ss 8.0	27182701
eCl@ss 9.0	27182701

#### ETIM

ETIM 2.0	EC001031
ETIM 3.0	EC001031
ETIM 4.0	EC001031
ETIM 5.0	EC002779
ETIM 6.0	EC002779
ETIM 7.0	EC002779

#### UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501
UNSPSC 18.0	31261501
UNSPSC 19.0	31261501
UNSPSC 20.0	31261501
UNSPSC 21.0	31261501

### Approvals

#### Approvals

---

Approvals

UL Recognized / EAC

---

Ex Approvals

## Side element - UM 45-SEFE - 2907826

### Approvals

---

#### Approval details

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm</a>	FILE E 240868
---------------	---	---	---------------

EAC			B.01742
-----	---	--	---------