

Interface module - VIP-2/PT/HD15SUB/M - 2904268


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with push-in connections and high density D-SUB miniature pin-strip, for mounting on NS 35 rails, no. of pos.: 15



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 814775
GTIN	4046356814775
Weight per Piece (excluding packing)	112.500 g
Custom tariff number	85366990
Country of origin	United States

Technical data

Dimensions

Width	46.9 mm
Height	72.1 mm
Depth	46.6 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Nominal voltage U_N	25 V AC
	60 V DC
Max. perm. current (per branch)	1 A

Interface module - VIP-2/PT/HD15SUB/M - 2904268

Technical data

General

Number of positions	15
Status display	No
Mounting position	any

Connection data

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Push-in connection
Stripping length	8 mm
Screw thread	M3
Number of positions	15
Conductor cross section solid	0.14 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 2.5 mm ²
Conductor cross section AWG	26 ... 14

Connection data 2

Connection name	Controller level
Connection method	High density D-SUB pin strip
Number of connections	1
Number of positions	15

Standards and Regulations

Connection in acc. with standard	CSA
Standards/regulations	EN 50178
Rated surge voltage	1.2 kV
Pollution degree	2
Overvoltage category	II


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings


Interface module - VIP-2/PT/HD15SUB/M - 2904268

Dimensional drawing

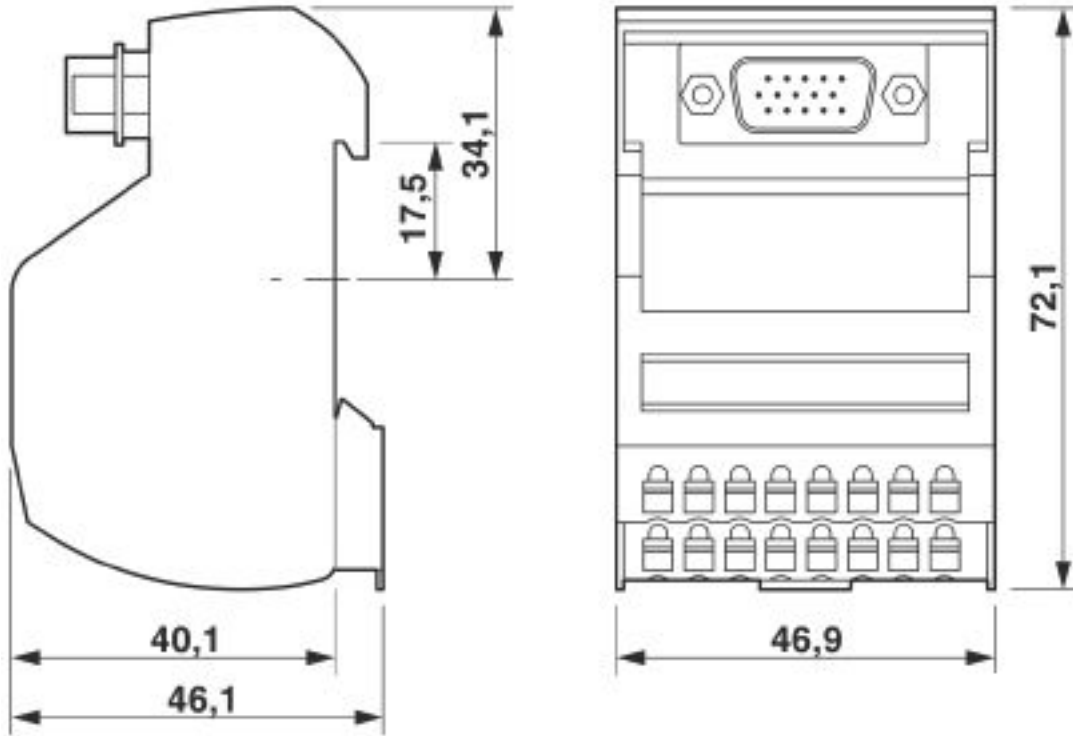

Interface module - VIP-2/PT/HD15SUB/M - 2904268

Circuit diagram

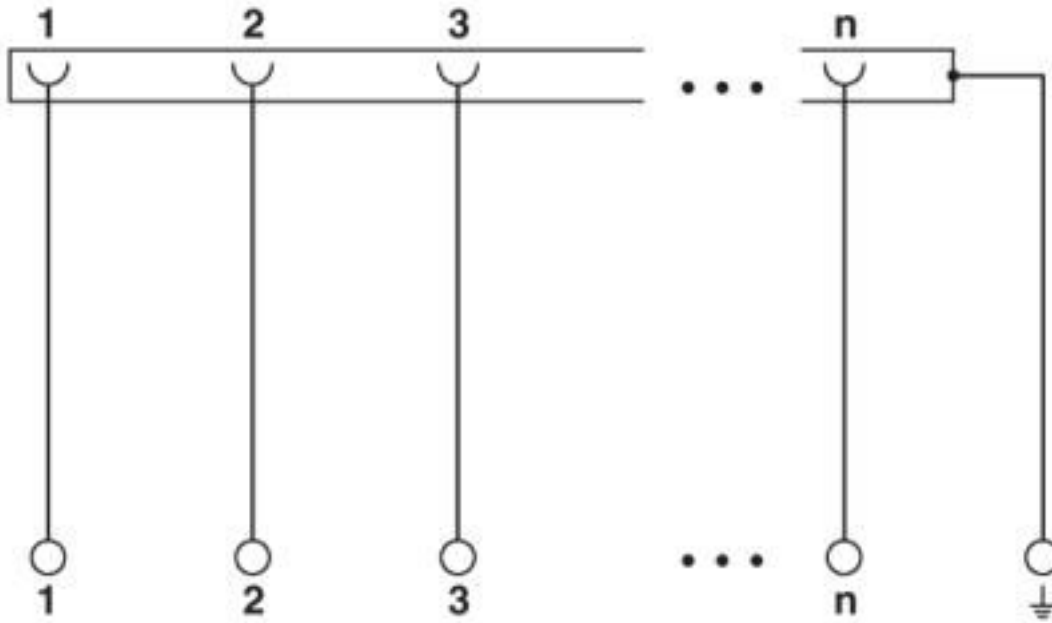

Universal circuit diagram

Classifications

eCl@ss

eCl@ss 10.0.1	27141152
eCl@ss 4.0	27250300
eCl@ss 4.1	27250300
eCl@ss 5.0	27250300
eCl@ss 5.1	27250300
eCl@ss 6.0	27242600
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152
eCl@ss 9.0	27141152

ETIM

ETIM 4.0	EC002780
ETIM 5.0	EC002780
ETIM 6.0	EC002780
ETIM 7.0	EC002780

Interface module - VIP-2/PT/HD15SUB/M - 2904268

Classifications

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121432
UNSPSC 18.0	39121432
UNSPSC 19.0	39121432
UNSPSC 20.0	39121432
UNSPSC 21.0	39121432

Approvals


Approvals


Approvals

CSA / UL Recognized / cUL Recognized / CSAus / EAC / cULus Recognized / cCSAus

Ex Approvals

Approval details

CSA		http://www.csagroup.org/services-industries/product-listing/	2122203
Nominal voltage UN		105 V	
Nominal current IN		1 A	
mm ² /AWG/kcmil		26-14	

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal voltage UN		125 V	
Nominal current IN		1 A	
mm ² /AWG/kcmil		26-14	

Interface module - VIP-2/PT/HD15SUB/M - 2904268

Approvals

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal voltage UN	125 V		
Nominal current IN	1 A		
mm ² /AWG/kcmil	26-14		

CSAus		http://www.csagroup.org/services-industries/product-listing/	2122203
Nominal voltage UN	105 V		
Nominal current IN	1 A		
mm ² /AWG/kcmil	28-14		

EAC		RU C- DE.A*30.B.01742
-----	--	--------------------------

cULus Recognized	
------------------	--

cCSAus	
--------	--