


Screw termination block - CT-TERMIBLOCK 10 DA - 0441711

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Screw termination block with disconnect contacts for accommodating protective plugs CT and CTM. Use in MCR and telecommunications systems. Design: 10 double wires

Your advantages

- ✓ Space-saving due to compact design
- ✓ Flexible fields of application with modular protective plug
- ✓ Maximum ease of maintenance thanks to the two-piece design



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 002213
GTIN	4017918002213
Weight per Piece (excluding packing)	185.400 g
Custom tariff number	85369010
Country of origin	Germany

Technical data

Dimensions

Height	43 mm
Width	118 mm
Depth	40.9 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Altitude	2000 m

Screw termination block - CT-TERMIBLOCK 10 DA - 0441711

Technical data

Ambient conditions

Degree of protection	IP20
----------------------	------

General

Housing material	PA
Flammability rating according to UL 94	V2
Color	black
Standards for clearances and creepage distances	IEC 60664-1
Overvoltage category	III
Degree of pollution	3
Mounting type	DIN rail: 35 mm
Type	LSA-PLUS module

Protective circuit

Maximum continuous voltage U_c	240 V AC
Operating effective current I_c at U_c	5 A

Connection data

Connection method	Screw terminal blocks
Connection method IN	Screw terminal blocks
Connection method OUT	Screw terminal blocks
Screw thread	M3
Tightening torque	0.5 Nm
Stripping length	7 mm
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section solid	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12


Environmental Product Compliance

REACH SVHC	4-Nonylphenol, ethoxylated
	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Screw termination block - CT-TERMIBLOCK 10 DA - 0441711

Dimensional drawing

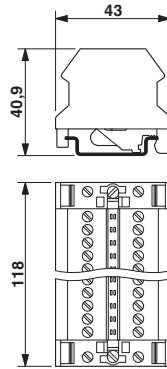

Classifications

eCl@ss

eCl@ss 10.0.1	27130815
eCl@ss 11.0	27130815
eCl@ss 4.0	27130800
eCl@ss 4.1	27130800
eCl@ss 5.0	27130800
eCl@ss 5.1	27130800
eCl@ss 6.0	27130800
eCl@ss 7.0	27130807
eCl@ss 9.0	27130815

ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000371
ETIM 6.0	EC002979
ETIM 7.0	EC002979

UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620
UNSPSC 19.0	39121620

Screw termination block - CT-TERMIBLOCK 10 DA - 0441711

Approvals


Approvals

Approvals


UL Listed / EAC / EAC

Ex Approvals

Approval details

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 138168
-----------	---	---	---------------

EAC			EAC-Zulassung
-----	--	--	---------------

EAC			RU C- DE.*09.B.00169
-----	---	--	-------------------------